



**Problem 7.5-8** A brass cube 50 mm on each edge is compressed in two perpendicular directions by forces  $P = 175$  kN (see figure).

Calculate the change  $\Delta V$  in the volume of the cube and the strain energy  $U$  stored in the cube, assuming  $E = 100$  GPa and  $\nu = 0.34$ .

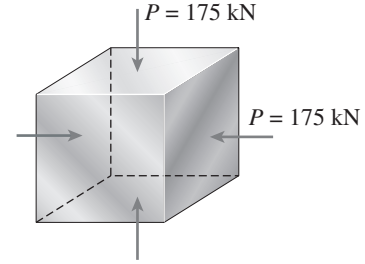

**Solution 7**



Side  $b = 50$  mm     $P = 175$  kN  
 $E = 100$  GPa     $\nu = 0.34$  (Brass)

$$\sigma_x = \sigma_y = -\frac{P}{b^2} = -\frac{(175 \text{ kN})}{(50 \text{ mm})^2} = -70.0 \text{ MPa}$$

CHANGE IN VOLUME


$$\begin{aligned} \text{Eq. (7-47): } e &= \frac{1 - 2\nu}{E}(\sigma_x + \sigma_y) = -448 \times 10^{-6} \\ V_0 &= b^3 = (50 \text{ mm})^3 = 125 \times 10^3 \text{ mm}^3 \\ \Delta V &= eV_0 = -56 \text{ mm}^3 \quad \leftarrow \\ &\text{(Decrease in volume)} \end{aligned}$$

STRAIN ENERGY


$$\begin{aligned} \text{Eq. (7-50): } \mu &= \frac{1}{2E}(\sigma_x^2 + \sigma_y^2 - 2\nu\sigma_x\sigma_y) \\ &= 0.03234 \text{ MPa} \\ U &= \mu V_0 = (0.03234 \text{ MPa})(125 \times 10^3 \text{ mm}^3) \\ &= 4.04 \text{ J} \quad \leftarrow \end{aligned}$$

**Problem 7.5-9** A 4.0-inch cube of concrete ( $E = 3.0 \times 10^6$  psi,  $\nu = 0.1$ ) is compressed in *biaxial stress* by means of a framework that is loaded as shown in the figure.

Assuming that each load  $F$  equals 20 k, determine the change  $\Delta V$  in the volume of the cube and the strain energy  $U$  stored in the cube.

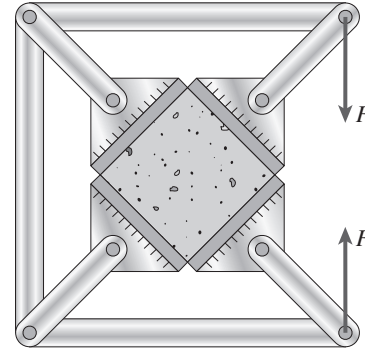


**Solution 7.5-9 Biaxial stress-concrete cube**

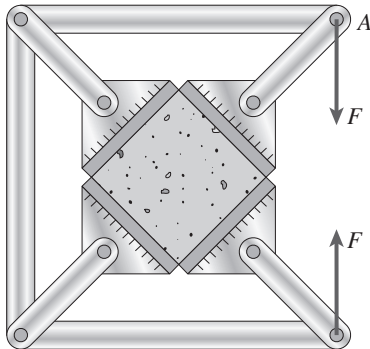

$b = 4$  in.  
 $E = 3.0 \times 10^6$  psi  
 $\nu = 0.1$   
 $F = 20$  kips

Joint A:  
 $P = F\sqrt{2}$   
 $= 28.28$  kips

$$\sigma_x = \sigma_y = -\frac{P}{b^2} = -1768 \text{ psi}$$



CHANGE IN VOLUME


$$\begin{aligned} \text{Eq. (7-47): } e &= \frac{1 - 2\nu}{E}(\sigma_x + \sigma_y) = -0.0009429 \\ V_0 &= b^3 = (4 \text{ in.})^3 = 64 \text{ in.}^3 \\ \Delta V &= eV_0 = -0.0603 \text{ in.}^3 \quad \leftarrow \\ &\text{(Decrease in volume)} \end{aligned}$$

STRAIN ENERGY

$$\begin{aligned} \text{Eq. (7-50): } \mu &= \frac{1}{2E}(\sigma_x^2 + \sigma_y^2 - 2\nu\sigma_x\sigma_y) \\ &= 0.9377 \text{ psi} \\ U &= \mu V_0 = 60.0 \text{ in.-lb} \quad \leftarrow \end{aligned}$$

**Problem 7.5-10** A square plate of width  $b$  and thickness  $t$  is loaded by normal forces  $P_x$  and  $P_y$ , and by shear forces  $V$ , as shown in the figure. These forces produce uniformly distributed stresses acting on the side faces of the plate.

Calculate the change  $\Delta V$  in the volume of the plate and the strain energy  $U$  stored in the plate if the dimensions are  $b = 600$  mm and  $t = 40$  mm, the plate is made of magnesium with  $E = 45$  GPa and  $\nu = 0.35$ , and the forces are  $P_x = 480$  kN,  $P_y = 180$  kN, and  $V = 120$  kN.

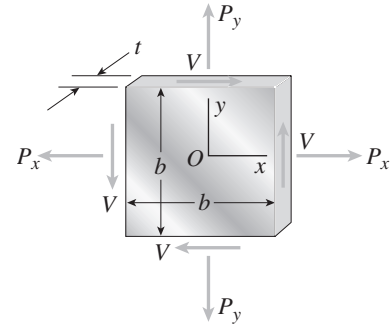

Probs. 7.5-10 and 7.5-11

**Solution 7.5-10 Square plate in plane stress**

$$\begin{aligned} b &= 600 \text{ mm} & t &= 40 \text{ mm} \\ E &= 45 \text{ GPa} & \nu &= 0.35 \text{ (magnesium)} \\ P_x &= 480 \text{ kN} & \sigma_x &= \frac{P_x}{bt} = 20.0 \text{ MPa} \\ P_y &= 180 \text{ kN} & \sigma_y &= \frac{P_y}{bt} = 7.5 \text{ MPa} \\ V &= 120 \text{ kN} & \tau_{xy} &= \frac{V}{bt} = 5.0 \text{ MPa} \end{aligned}$$

STRAIN ENERGY

$$\text{Eq. (7-50): } \mu = \frac{1}{2E}(\sigma_x^2 + \sigma_y^2 - 2\nu\sigma_x\sigma_y) + \frac{\tau_{xy}^2}{2G}$$

$$G = \frac{E}{2(1+\nu)} = 16.667 \text{ GPa}$$

Substitute numerical values:

$$\begin{aligned} \mu &= 4653 \text{ Pa} \\ U &= \mu V_0 = 67.0 \text{ N} \cdot \text{m} = 67.0 \text{ J} \quad \leftarrow \end{aligned}$$

CHANGE IN VOLUME

$$\begin{aligned} \text{Eq. (7-47): } e &= \frac{1-2\nu}{E}(\sigma_x + \sigma_y) = 183.33 \times 10^{-6} \\ V_0 &= b^2t = 14.4 \times 10^6 \text{ mm}^3 \\ \Delta V &= eV_0 = 2640 \text{ mm}^3 \quad \leftarrow \\ &\text{(Increase in volume)} \end{aligned}$$

**Problem 7.5-11** Solve the preceding problem for an aluminum plate with  $b = 12$  in.,  $t = 1.0$  in.,  $E = 10,600$  ksi,  $\nu = 0.33$ ,  $P_x = 90$  k,  $P_y = 20$  k, and  $V = 15$  k.

**Solution 7.5-11 Square plate in plane stress**

$$\begin{aligned} b &= 12.0 \text{ in.} & t &= 1.0 \text{ in.} \\ E &= 10,600 \text{ ksi} & \nu &= 0.33 \text{ (aluminum)} \\ P_x &= 90 \text{ k} & \sigma_x &= \frac{P_x}{bt} = 7500 \text{ psi} \\ P_y &= 20 \text{ k} & \sigma_y &= \frac{P_y}{bt} = 1667 \text{ psi} \\ V &= 15 \text{ k} & \tau_{xy} &= \frac{V}{bt} = 1250 \text{ psi} \end{aligned}$$

STRAIN ENERGY

$$\text{Eq. (7-50): } \mu = \frac{1}{2E}(\sigma_x^2 + \sigma_y^2 - 2\nu\sigma_x\sigma_y) + \frac{\tau_{xy}^2}{2G}$$

$$G = \frac{E}{2(1+\nu)} = 3985 \text{ ksi}$$

Substitute numerical values:


$$\begin{aligned} \mu &= 2.591 \text{ psi} \\ U &= \mu V_0 = 373 \text{ in.}\cdot\text{lb} \quad \leftarrow \end{aligned}$$

CHANGE IN VOLUME

$$\begin{aligned} \text{Eq. (7-47): } e &= \frac{1-2\nu}{E}(\sigma_x + \sigma_y) = 294 \times 10^{-6} \\ V_0 &= b^2t = 144 \text{ in.}^3 \\ \Delta V &= eV_0 = 0.0423 \text{ in.}^3 \quad \leftarrow \\ &\text{(Increase in volume)} \end{aligned}$$

**Problem 7.5-12** A circle of diameter  $d = 200$  mm is etched on a brass plate (see figure). The plate has dimensions  $400 \times 400 \times 20$  mm. Forces are applied to the plate, producing uniformly distributed normal stresses  $\sigma_x = 42$  MPa and  $\sigma_y = 14$  MPa.

Calculate the following quantities: (a) the change in length  $\Delta ac$  of diameter  $ac$ ; (b) the change in length  $\Delta bd$  of diameter  $bd$ ; (c) the change  $\Delta t$  in the thickness of the plate; (d) the change  $\Delta V$  in the volume of the plate, and (e) the strain energy  $U$  stored in the plate. (Assume  $E = 100$  GPa and  $\nu = 0.34$ .)

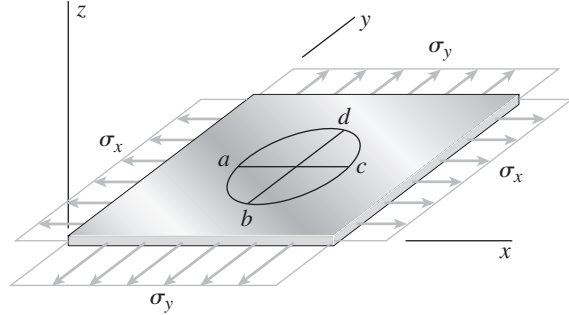

### Solution 7.5-12 Plate in biaxial stress

$\sigma_x = 42$  MPa    $\sigma_y = 14$  MPa  
 Dimensions:  $400 \times 400 \times 20$  (mm)  
 Diameter of circle:  $d = 200$  mm  
 $E = 100$  GPa    $\nu = 0.34$  (Brass)

(a) CHANGE IN LENGTH OF DIAMETER IN  $x$  DIRECTION

$$\text{Eq. (7-39a): } \epsilon_x = \frac{1}{E}(\sigma_x - \nu\sigma_y) = 372.4 \times 10^{-6}$$

$$\Delta ac = \epsilon_x d = 0.0745 \text{ mm} \quad \leftarrow$$

(increase)

(b) CHANGE IN LENGTH OF DIAMETER IN  $y$  DIRECTION

$$\text{Eq. (7-39b): } \epsilon_y = \frac{1}{E}(\sigma_y - \nu\sigma_x) = -2.80 \times 10^{-6}$$

$$\Delta bd = \epsilon_y d = -560 \times 10^{-6} \text{ mm} \quad \leftarrow$$

(decrease)

(c) CHANGE IN THICKNESS

$$\text{Eq. (7-39c): } \epsilon_z = -\frac{\nu}{E}(\sigma_x + \sigma_y) = -190.4 \times 10^{-6}$$

$$\Delta t = \epsilon_z t = -0.00381 \text{ mm} \quad \leftarrow$$

(decrease)

(d) CHANGE IN VOLUME

$$\text{Eq. (7-47): } e = \frac{1 - 2\nu}{E}(\sigma_x + \sigma_y) = 179.2 \times 10^{-6}$$

$$V_0 = (400)(400)(20) = 3.2 \times 10^6 \text{ mm}^3$$

$$\Delta V = eV_0 = 573 \text{ mm}^3 \quad \leftarrow$$

(increase)

(e) STRAIN ENERGY

$$\text{Eq. (7-50): } \mu = \frac{1}{2E}(\sigma_x^2 + \sigma_y^2 - 2\nu\sigma_x\sigma_y)$$

$$= 7.801 \times 10^{-3} \text{ MPa}$$


$$U = \mu V_0 = 25.0 \text{ N} \cdot \text{m} = 25.0 \text{ J} \quad \leftarrow$$

## Triaxial Stress

When solving the problems for Section 7.6, assume that the material is linearly elastic with modulus of elasticity  $E$  and Poisson's ratio  $\nu$ .

**Problem 7.6-1** An element of aluminum in the form of a rectangular parallelepiped (see figure) of dimensions  $a = 6.0$  in.,  $b = 4.0$  in., and  $c = 3.0$  in. is subjected to *triaxial stresses*  $\sigma_x = 12,000$  psi,  $\sigma_y = -4,000$  psi, and  $\sigma_z = -1,000$  psi acting on the  $x$ ,  $y$ , and  $z$  faces, respectively.

Determine the following quantities: (a) the maximum shear stress  $\tau_{\max}$  in the material; (b) the changes  $\Delta a$ ,  $\Delta b$ , and  $\Delta c$  in the dimensions of the element; (c) the change  $\Delta V$  in the volume; and (d) the strain energy  $U$  stored in the element. (Assume  $E = 10,400$  ksi and  $\nu = 0.33$ .)

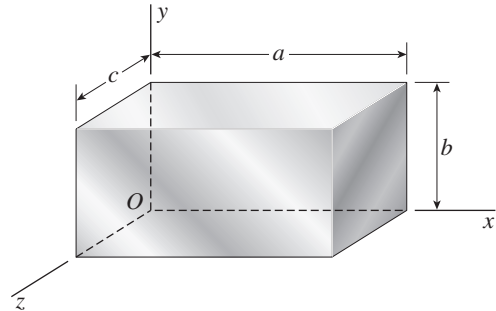

Probs. 7.6-1 and 7.6-2

**Solution 7.6-1 Triaxial stress**

$$\begin{aligned}\sigma_x &= 12,000 \text{ psi} & \sigma_y &= -4,000 \text{ psi} \\ \sigma_z &= -1,000 \text{ psi} \\ a &= 6.0 \text{ in.} & b &= 4.0 \text{ in.} & c &= 3.0 \text{ in.} \\ E &= 10,400 \text{ ksi} & \nu &= 0.33 & & \text{(aluminum)}\end{aligned}$$

**(a) MAXIMUM SHEAR STRESS**

$$\begin{aligned}\sigma_1 &= 12,000 \text{ psi} & \sigma_2 &= -1,000 \text{ psi} \\ \sigma_3 &= -4,000 \text{ psi} \\ \tau_{\max} &= \frac{\sigma_1 - \sigma_3}{2} = 8,000 \text{ psi} \quad \leftarrow\end{aligned}$$

**(b) CHANGES IN DIMENSIONS**

$$\text{Eq. (7-53a): } \varepsilon_x = \frac{\sigma_x}{E} - \frac{\nu}{E}(\sigma_y + \sigma_z) = 1312.5 \times 10^{-6}$$

$$\text{Eq. (7-53b): } \varepsilon_y = \frac{\sigma_y}{E} - \frac{\nu}{E}(\sigma_z + \sigma_x) = -733.7 \times 10^{-6}$$

$$\text{Eq. (7-53c): } \varepsilon_z = \frac{\sigma_z}{E} - \frac{\nu}{E}(\sigma_x + \sigma_y) = -350.0 \times 10^{-6}$$

$$\left. \begin{aligned}\Delta a &= a\varepsilon_x = 0.0079 \text{ in.} & & \text{(increase)} \\ \Delta b &= b\varepsilon_y = -0.0029 \text{ in.} & & \text{(decrease)} \\ \Delta c &= c\varepsilon_z = -0.0011 \text{ in.} & & \text{(decrease)}\end{aligned} \right\} \leftarrow$$

**(c) CHANGE IN VOLUME**

Eq. (7-56):

$$e = \frac{1 - 2\nu}{E}(\sigma_x + \sigma_y + \sigma_z) = 228.8 \times 10^{-6}$$

$$V = abc$$

$$\Delta V = e(abc) = 0.0165 \text{ in.}^3 \text{ (increase)} \quad \leftarrow$$

**(d) STRAIN ENERGY**

$$\begin{aligned}\text{Eq. (7-57a): } \mu &= \frac{1}{2}(\sigma_x \varepsilon_x + \sigma_y \varepsilon_y + \sigma_z \varepsilon_z) \\ &= 9.517 \text{ psi}\end{aligned}$$

$$U = \mu(abc) = 68.5 \text{ in.-lb} \quad \leftarrow$$

**Problem 7.6-2** Solve the preceding problem if the element is steel ( $E = 200 \text{ GPa}$ ,  $\nu = 0.30$ ) with dimensions  $a = 300 \text{ mm}$ ,  $b = 150 \text{ mm}$ , and  $c = 150 \text{ mm}$  and the stresses are  $\sigma_x = -60 \text{ MPa}$ ,  $\sigma_y = -40 \text{ MPa}$ , and  $\sigma_z = -40 \text{ MPa}$ .

**Solution 7.6-2 Triaxial stress**

$$\begin{aligned}\sigma_x &= 60 \text{ MPa} & \sigma_y &= -40 \text{ MPa} \\ \sigma_z &= -40 \text{ MPa} \\ a &= 300 \text{ mm} & b &= 150 \text{ mm} & c &= 150 \text{ mm} \\ E &= 200 \text{ GPa} & \nu &= 0.30 & & \text{(steel)}\end{aligned}$$

**(a) MAXIMUM SHEAR STRESS**

$$\begin{aligned}\sigma_1 &= -40 \text{ MPa} & \sigma_2 &= -40 \text{ MPa} \\ \sigma_3 &= -60 \text{ MPa} \\ \tau_{\max} &= \frac{\sigma_1 - \sigma_3}{2} = 10.0 \text{ MPa} \quad \leftarrow\end{aligned}$$

**(b) CHANGES IN DIMENSIONS**

$$\text{Eq. (7-53a): } \varepsilon_x = \frac{\sigma_x}{E} - \frac{\nu}{E}(\sigma_y + \sigma_z) = -180.0 \times 10^{-6}$$

$$\text{Eq. (7-53b): } \varepsilon_y = \frac{\sigma_y}{E} - \frac{\nu}{E}(\sigma_z + \sigma_x) = -50.0 \times 10^{-6}$$

$$\text{Eq. (7-53c): } \varepsilon_z = \frac{\sigma_z}{E} - \frac{\nu}{E}(\sigma_x + \sigma_y) = -50.0 \times 10^{-6}$$

$$\Delta a = a\varepsilon_x = -0.0540 \text{ mm} \quad \text{(decrease)}$$

$$\Delta b = b\varepsilon_y = -0.0075 \text{ mm} \quad \text{(decrease)} \quad \leftarrow$$

$$\Delta c = c\varepsilon_z = -0.0075 \text{ mm} \quad \text{(decrease)}$$

**(c) CHANGE IN VOLUME**

Eq. (7-56):

$$e = \frac{1 - 2\nu}{E}(\sigma_x + \sigma_y + \sigma_z) = -280.0 \times 10^{-6}$$

$$V = abc$$

$$\Delta V = e(abc) = -1890 \text{ mm}^3 \text{ (decrease)} \quad \leftarrow$$


**(d) STRAIN ENERGY**

$$\begin{aligned}\text{Eq. (7-57a): } \mu &= \frac{1}{2}(\sigma_x \varepsilon_x + \sigma_y \varepsilon_y + \sigma_z \varepsilon_z) \\ &= 0.00740 \text{ MPa}\end{aligned}$$

$$U = \mu(abc) = 50.0 \text{ N} \cdot \text{m} = 50.0 \text{ J} \quad \leftarrow$$

**Problem 7.6-3** A cube of cast iron with sides of length  $a = 4.0$  in. (see figure) is tested in a laboratory under *triaxial stress*. Gages mounted on the testing machine show that the compressive strains in the material are  $\epsilon_x = -225 \times 10^{-6}$  and  $\epsilon_y = \epsilon_z = -37.5 \times 10^{-6}$ .

Determine the following quantities: (a) the normal stresses  $\sigma_x$ ,  $\sigma_y$ , and  $\sigma_z$  acting on the  $x$ ,  $y$ , and  $z$  faces of the cube; (b) the maximum shear stress  $\tau_{\max}$  in the material; (c) the change  $\Delta V$  in the volume of the cube; and (d) the strain energy  $U$  stored in the cube. (Assume  $E = 14,000$  ksi and  $\nu = 0.25$ .)



Probs. 7.6-3 and 7.6-4

**Solution 7.6-3 Triaxial stress (cube)**

$$\begin{aligned} \epsilon_x &= -225 \times 10^{-6} & \epsilon_y &= -37.5 \times 10^{-6} \\ \epsilon_z &= -37.5 \times 10^{-6} & a &= 4.0 \text{ in.} \\ E &= 14,000 \text{ ksi} & \nu &= 0.25 \text{ (cast iron)} \end{aligned}$$

(a) NORMAL STRESSES

Eq. (7-54a):

$$\begin{aligned} \sigma_x &= \frac{E}{(1 + \nu)(1 - 2\nu)} [(1 - \nu)\epsilon_x + \nu(\epsilon_y + \epsilon_z)] \\ &= -4200 \text{ psi} \quad \leftarrow \end{aligned}$$

In a similar manner, Eqs. (7-54 b and c) give

$$\sigma_y = -2100 \text{ psi} \quad \sigma_z = -2100 \text{ psi} \quad \leftarrow$$

(b) MAXIMUM SHEAR STRESS

$$\begin{aligned} \sigma_1 &= -2100 \text{ psi} & \sigma_2 &= -2100 \text{ psi} \\ \sigma_3 &= -4200 \text{ psi} \\ \tau_{\max} &= \frac{\sigma_1 - \sigma_3}{2} = 1050 \text{ psi} \quad \leftarrow \end{aligned}$$

(c) CHANGE IN VOLUME

$$\begin{aligned} \text{Eq. (7-55): } e &= \epsilon_x + \epsilon_y + \epsilon_z = -0.000300 \\ V &= a^3 \\ \Delta V &= ea^3 = -0.0192 \text{ in.}^3 \text{ (decrease)} \quad \leftarrow \end{aligned}$$

(d) STRAIN ENERGY

$$\begin{aligned} \text{Eq. (7-57a): } \mu &= \frac{1}{2}(\sigma_x \epsilon_x + \sigma_y \epsilon_y + \sigma_z \epsilon_z) \\ &= 0.55125 \text{ psi} \\ U &= \mu a^3 = 35.3 \text{ in.-lb} \quad \leftarrow \end{aligned}$$

**Problem 7.6-4** Solve the preceding problem if the cube is granite ( $E = 60$  GPa,  $\nu = 0.25$ ) with dimensions  $a = 75$  mm and compressive strains  $\epsilon_x = -720 \times 10^{-6}$  and  $\epsilon_y = \epsilon_z = -270 \times 10^{-6}$ .

**Solution 7.6-4 Triaxial stress (cube)**

$$\begin{aligned} \epsilon_x &= -720 \times 10^{-6} & \epsilon_y &= -270 \times 10^{-6} \\ \epsilon_z &= -270 \times 10^{-6} & a &= 75 \text{ mm} & E &= 60 \text{ GPa} \\ \nu &= 0.25 \text{ (Granite)} \end{aligned}$$

(a) NORMAL STRESSES

Eq. (7-54a):

$$\begin{aligned} \sigma_x &= \frac{E}{(1 + \nu)(1 - 2\nu)} [(1 - \nu)\epsilon_x + \nu(\epsilon_y + \epsilon_z)] \\ &= -64.8 \text{ MPa} \quad \leftarrow \end{aligned}$$

In a similar manner, Eqs. (7-54 b and c) give

$$\sigma_y = -43.2 \text{ MPa} \quad \sigma_z = -43.2 \text{ MPa} \quad \leftarrow$$

(b) MAXIMUM SHEAR STRESS

$$\begin{aligned} \sigma_1 &= -43.2 \text{ MPa} & \sigma_2 &= -43.2 \text{ MPa} \\ \sigma_3 &= -64.8 \text{ MPa} \\ \tau_{\max} &= \frac{\sigma_1 - \sigma_3}{2} = 10.8 \text{ MPa} \quad \leftarrow \end{aligned}$$

(c) CHANGE IN VOLUME


$$\begin{aligned} \text{Eq. (7-55): } e &= \epsilon_x + \epsilon_y + \epsilon_z = -1260 \times 10^{-6} \\ V &= a^3 \\ \Delta V &= ea^3 = -532 \text{ mm}^3 \text{ (decrease)} \quad \leftarrow \end{aligned}$$

(d) STRAIN ENERGY

$$\begin{aligned} \text{Eq. (7-57a): } \mu &= \frac{1}{2}(\sigma_x \epsilon_x + \sigma_y \epsilon_y + \sigma_z \epsilon_z) \\ &= 0.03499 \text{ MPa} = 34.99 \text{ kPa} \\ U &= \mu a^3 = 14.8 \text{ N} \cdot \text{m} = 14.8 \text{ J} \quad \leftarrow \end{aligned}$$

**Problem 7.6-5** An element of aluminum in *triaxial stress* (see figure) is subjected to stresses  $\sigma_x = 5200$  psi (tension),  $\sigma_y = -4750$  psi (compression), and  $\sigma_z = -3090$  psi (compression). It is also known that the normal strains in the  $x$  and  $y$  directions are  $\epsilon_x = 713.8 \times 10^{-6}$  (elongation) and  $\epsilon_y = -502.3 \times 10^{-6}$  (shortening).

What is the bulk modulus  $K$  for the aluminum?

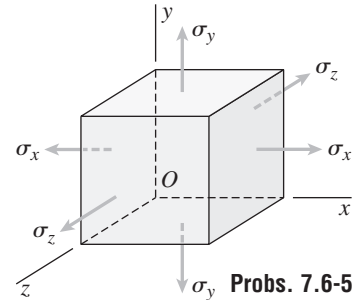

Probs. 7.6-5 and 7.6-6

**Solution 7.6-5 Triaxial stress (bulk modulus)**

$$\begin{aligned}\sigma_x &= 5200 \text{ psi} & \sigma_y &= -4750 \text{ psi} \\ \sigma_z &= -3090 \text{ psi} & \epsilon_x &= 713.8 \times 10^{-6} \\ \epsilon_y &= -502.3 \times 10^{-6}\end{aligned}$$

Find  $K$ .

$$\text{Eq. (7-53a): } \epsilon_x = \frac{\sigma_x}{E} - \frac{\nu}{E}(\sigma_y + \sigma_z)$$

$$\text{Eq. (7-53b): } \epsilon_y = \frac{\sigma_y}{E} - \frac{\nu}{E}(\sigma_z + \sigma_x)$$

Substitute numerical values and rearrange:

$$(713.8 \times 10^{-6}) E = 5200 + 7840 \nu \quad (1)$$

$$(-502.3 \times 10^{-6}) E = -4750 - 2110 \nu \quad (2)$$

Units:  $E = \text{psi}$

Solve simultaneously Eqs. (1) and (2):

$$E = 10.801 \times 10^6 \text{ psi} \quad \nu = 0.3202$$

$$\text{Eq. (7-61): } K = \frac{E}{3(1 - 2\nu)} = 10.0 \times 10^6 \text{ psi} \quad \leftarrow$$

**Problem 7.6-6** Solve the preceding problem if the material is nylon subjected to compressive stresses  $\sigma_x = -4.5$  MPa,  $\sigma_y = -3.6$  MPa, and  $\sigma_z = -2.1$  MPa, and the normal strains are  $\epsilon_x = -740 \times 10^{-6}$  and  $\epsilon_y = -320 \times 10^{-6}$  (shortenings).

**Solution 7.6-6 Triaxial stress (bulk modulus)**

$$\begin{aligned}\sigma_x &= -4.5 \text{ MPa} & \sigma_y &= -3.6 \text{ MPa} \\ \sigma_z &= -2.1 \text{ MPa} & \epsilon_x &= -740 \times 10^{-6} \\ \epsilon_y &= -320 \times 10^{-6}\end{aligned}$$

Find  $K$ .

$$\text{Eq. (7-53a): } \epsilon_x = \frac{\sigma_x}{E} - \frac{\nu}{E}(\sigma_y + \sigma_z)$$

$$\text{Eq. (7-53b): } \epsilon_y = \frac{\sigma_y}{E} - \frac{\nu}{E}(\sigma_z + \sigma_x)$$

Substitute numerical value and rearrange:

$$(-740 \times 10^{-6}) E = -4.5 + 5.7 \nu \quad (1)$$

$$(-320 \times 10^{-6}) E = -3.6 + 6.6 \nu \quad (2)$$

Units:  $E = \text{MPa}$

Solve simultaneously Eqs. (1) and (2):


$$E = 3,000 \text{ MPa} = 3.0 \text{ GPa} \quad \nu = 0.40$$

$$\text{Eq. (7-61): } K = \frac{E}{3(1 - 2\nu)} = 5.0 \text{ GPa} \quad \leftarrow$$



**Problem 7.6-7** A rubber cylinder  $R$  of length  $L$  and cross-sectional area  $A$  is compressed inside a steel cylinder  $S$  by a force  $F$  that applies a uniformly distributed pressure to the rubber (see figure).

(a) Derive a formula for the lateral pressure  $p$  between the rubber and the steel. (Disregard friction between the rubber and the steel, and assume that the steel cylinder is rigid when compared to the rubber.)

(b) Derive a formula for the shortening  $\delta$  of the rubber cylinder.

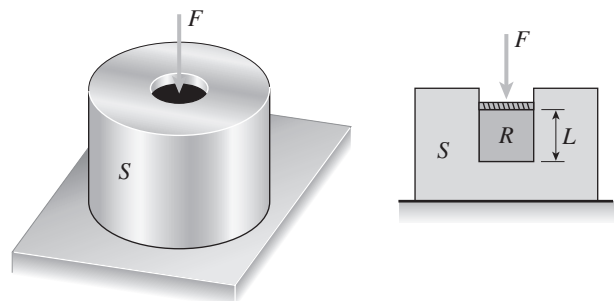

**Solution 7.6-7 Rubber cylinder**

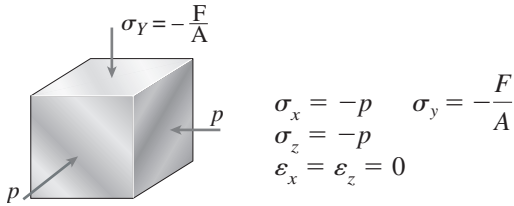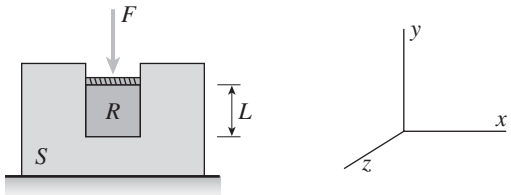

(a) LATERAL PRESSURE

Eq. (7-53a):  $\epsilon_x = \frac{\sigma_x}{E} - \frac{\nu}{E}(\sigma_y + \sigma_z)$   
 OR  $0 = -p - \nu\left(-\frac{F}{A} - p\right)$   
 solve for  $p$ :  $p = \frac{\nu}{1 - \nu}\left(\frac{F}{A}\right)$  ←

(b) SHORTENING

Eq. (7-53b):  $\epsilon_y = \frac{\sigma_y}{E} - \frac{\nu}{E}(\sigma_z + \sigma_x)$   
 $= -\frac{F}{EA} - \frac{\nu}{E}(-2p)$   
 Substitute for  $p$  and simplify:  
 $\epsilon_y = \frac{F}{EA} \frac{(1 + \nu)(-1 + 2\nu)}{1 - \nu}$

(Positive  $\epsilon_y$  represents an increase in strain, that is, elongation.)

$\delta = -\epsilon_y L$   
 $\delta = \frac{(1 + \nu)(1 - 2\nu)}{(1 - \nu)} \left(\frac{FL}{EA}\right)$  ←


(Positive  $\delta$  represents a shortening of the rubber cylinder.)

**Problem 7.6-8** A block  $R$  of rubber is confined between plane parallel walls of a steel block  $S$  (see figure). A uniformly distributed pressure  $p_0$  is applied to the top of the rubber block by a force  $F$ .



(a) Derive a formula for the lateral pressure  $p$  between the rubber and the steel. (Disregard friction between the rubber and the steel, and assume that the steel block is rigid when compared to the rubber.)

(b) Derive a formula for the dilatation  $e$  of the rubber.

(c) Derive a formula for the strain-energy density  $u$  of the rubber.

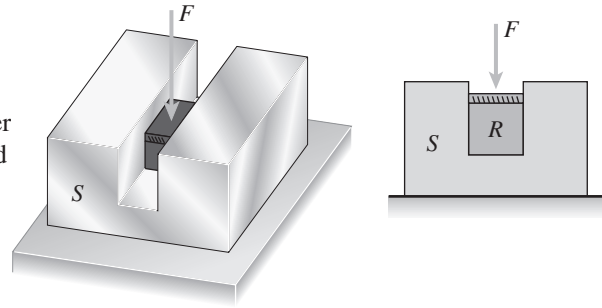

**Solution 7.6-8 Block of rubber**

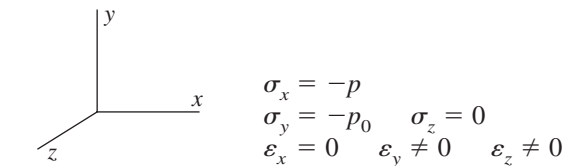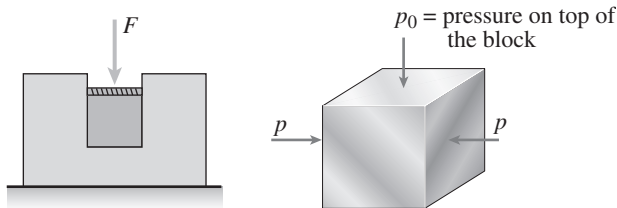

(a) LATERAL PRESSURE

Eq. (7-53a):  $\epsilon_x = \frac{\sigma_x}{E} - \frac{\nu}{E}(\sigma_y + \sigma_z)$   
 OR  $0 = -p - \nu(-p_0) \quad \therefore p = \nu p_0$  ←

(b) DILATATION

Eq. (7-56):  $e = \frac{1 - 2\nu}{E}(\sigma_x + \sigma_y + \sigma_z)$   
 $= \frac{1 - 2\nu}{E}(-p - p_0)$

Substitute for  $p$ :

$e = -\frac{(1 + \nu)(1 - 2\nu)p_0}{E}$  ←

(c) STRAIN ENERGY DENSITY

Eq. (7-57b):  
 $\mu = \frac{1}{2E}(\sigma_x^2 + \sigma_y^2 + \sigma_z^2) - \frac{\nu}{E}(\sigma_x\sigma_y + \sigma_x\sigma_z + \sigma_y\sigma_z)$

Substitute for  $\sigma_x$ ,  $\sigma_y$ ,  $\sigma_z$ , and  $p$ :

$u = \frac{(1 - \nu^2)p_0^2}{2E}$  ←

**Problem 7.6-9** A solid spherical ball of brass ( $E = 15 \times 10^6$  psi,  $\nu = 0.34$ ) is lowered into the ocean to a depth of 10,000 ft. The diameter of the ball is 11.0 in.

Determine the decrease  $\Delta d$  in diameter, the decrease  $\Delta V$  in volume, and the strain energy  $U$  of the ball.

**Solution 7.6-9 Brass sphere**

$$E = 15 \times 10^6 \text{ psi} \quad \nu = 0.34$$

Lowered in the ocean to depth  $h = 10,000$  ft

Diameter  $d = 11.0$  in.

Sea water:  $\gamma = 63.8$  lb/ft<sup>3</sup>

Pressure:  $\sigma_0 = \gamma h = 638,000$  lb/ft<sup>2</sup> = 4431 psi

DECREASE IN DIAMETER

$$\text{Eq. (7-59): } \varepsilon_0 = \frac{\sigma_0}{E}(1 - 2\nu) = 94.53 \times 10^{-6}$$

$$\Delta d = \varepsilon_0 d = 1.04 \times 10^{-3} \text{ in.} \quad \leftarrow$$

(decrease)

DECREASE IN VOLUME

$$\text{Eq. (7-60): } e = 3\varepsilon_0 = 283.6 \times 10^{-6}$$

$$V_0 = \frac{4}{3}\pi r^3 = \frac{4}{3}(\pi)\left(\frac{11.0 \text{ in.}}{2}\right)^3 = 696.9 \text{ in.}^3$$

$$\Delta V = eV_0 = 0.198 \text{ in.}^3 \quad \leftarrow$$

(decrease)

STRAIN ENERGY

Use Eq. (7-57b) with  $\sigma_x = \sigma_y = \sigma_z = \sigma_0$ :

$$\mu = \frac{3(1 - 2\nu)\sigma_0^2}{2E} = 0.6283 \text{ psi}$$

$$U = \mu V_0 = 438 \text{ in.-lb} \quad \leftarrow$$

**Problem 7.6-10** A solid steel sphere ( $E = 210$  GPa,  $\nu = 0.3$ ) is subjected to hydrostatic pressure  $p$  such that its volume is reduced by 0.4%.

(a) Calculate the pressure  $p$ .

(b) Calculate the volume modulus of elasticity  $K$  for the steel.

(c) Calculate the strain energy  $U$  stored in the sphere if its diameter is  $d = 150$  mm.

**Solution 7.6-10 Steel sphere**

$$E = 210 \text{ GPa} \quad \nu = 0.3$$

Hydrostatic Pressure.  $V_0 =$  Initial volume

$$\Delta V = 0.004V_0$$

$$\text{Dilatation: } e = \frac{\Delta V}{V_0} = 0.004$$

(a) PRESSURE

$$\text{Eq. (7-60): } e = \frac{3\sigma_0(1 - 2\nu)}{E}$$

$$\text{or } \sigma_0 = \frac{Ee}{3(1 - 2\nu)} = 700 \text{ MPa}$$

$$\text{Pressure } p = \sigma_0 = 700 \text{ MPa} \quad \leftarrow$$

(b) VOLUME MODULUS OF ELASTICITY

$$\text{Eq. (7-63): } K = \frac{\sigma_0}{E} = \frac{700 \text{ MPa}}{0.004} = 175 \text{ GPa} \quad \leftarrow$$

(c) STRAIN ENERGY ( $d =$  diameter)

$$d = 150 \text{ mm} \quad r = 75 \text{ mm}$$

From Eq. (7-57b) with  $\sigma_x = \sigma_y = \sigma_z = \sigma_0$ :

$$\mu = \frac{3(1 - 2\nu)\sigma_0^2}{2E} = 1.40 \text{ MPa}$$

$$V_0 = \frac{4\pi r^3}{3} = 1767 \times 10^{-6} \text{ m}^3$$

$$U = \mu V_0 = 2470 \text{ N} \cdot \text{m} = 2470 \text{ J} \quad \leftarrow$$



**Problem 7.6-11** A solid bronze sphere (volume modulus of elasticity  $K = 14.5 \times 10^6$  psi) is suddenly heated around its outer surface. The tendency of the heated part of the sphere to expand produces uniform tension in all directions at the center of the sphere.

If the stress at the center is 12,000 psi, what is the strain? Also, calculate the unit volume change  $e$  and the strain-energy density  $u$  at the center.

**Solution 7.6-11 Bronze sphere (heated)**

$K = 14.5 \times 10^6$  psi

$\sigma_0 = 12,000$  psi (tension at the center)

STRAIN AT THE CENTER OF THE SPHERE

Eq. (7-59):  $\epsilon_0 = \frac{\sigma_0}{E}(1 - 2\nu)$

Eq. (7-61):  $K = \frac{E}{3(1 - 2\nu)}$

Combine the two Equations:

$\epsilon_0 = \frac{\sigma_0}{3K} = 276 \times 10^{-6}$  ←

UNIT VOLUME CHANGE AT THE CENTER

Eq. (7-62):  $e = \frac{\sigma_0}{K} = 828 \times 10^{-6}$  ←

STRAIN ENERGY DENSITY AT THE CENTER

Eq. (7-57b) with  $\sigma_x = \sigma_y = \sigma_z = \sigma_0$ :

$\mu = \frac{3(1 - 2\nu)\sigma_0^2}{2E} = \frac{\sigma_0^2}{2K}$



$\mu = 4.97$  psi ←

**Plane Strain**

When solving the problems for Section 7.7, consider only the in-plane strains (the strains in the  $xy$  plane) unless stated otherwise. Use the transformation equations of plane strain except when Mohr's circle is specified (Problems 7.7-23 through 7.7-28).


**Problem 7.7-1** A thin rectangular plate in *biaxial stress* is subjected to stresses  $\sigma_x$  and  $\sigma_y$ , as shown in part (a) of the figure on the next page. The width and height of the plate are  $b = 8.0$  in. and  $h = 4.0$  in., respectively. Measurements show that the normal strains in the  $x$  and  $y$  directions are  $\epsilon_x = 195 \times 10^{-6}$  and  $\epsilon_y = -125 \times 10^{-6}$ , respectively.

With reference to part (b) of the figure, which shows a two-dimensional view of the plate, determine the following quantities: (a) the increase  $\Delta d$  in the length of diagonal  $Od$ ; (b) the change  $\Delta\phi$  in the angle  $\phi$  between diagonal  $Od$  and the  $x$  axis; and (c) the change  $\Delta\psi$  in the angle  $\psi$  between diagonal  $Od$  and the  $y$  axis.

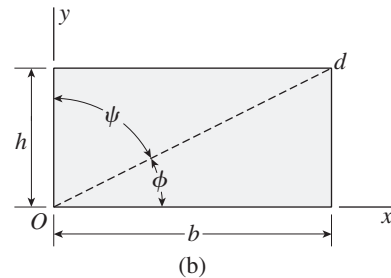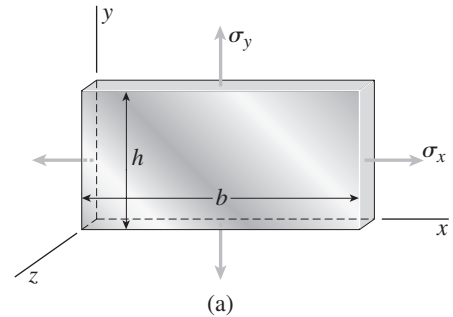

Probs. 7.7-1 and 7.7-2

**Solution 7.7-1 Plate in biaxial stress**

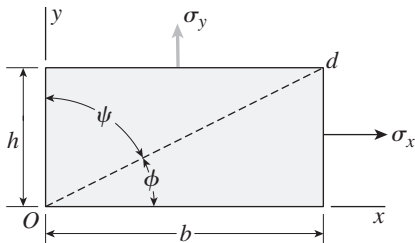

$b = 8.0$  in.     $h = 4.0$  in.     $\epsilon_x = 195 \times 10^{-6}$

$\epsilon_y = -125 \times 10^{-6}$      $\gamma_{xy} = 0$

$\phi = \arctan \frac{h}{b} = 26.57^\circ$

$L_d = \sqrt{b^2 + h^2} = 8.944$  in.

(a) INCREASE IN LENGTH OF DIAGONAL

$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$

For  $\theta = \phi = 26.57^\circ$ ,  $\epsilon_{x_1} = 130.98 \times 10^{-6}$

$\Delta d = \epsilon_{x_1} L_d = 0.00117$  in. ←

(b) CHANGE IN ANGLE  $\phi$

$$\text{Eq. (7-68): } \alpha = -(\epsilon_x - \epsilon_y) \sin \theta \cos \theta - \gamma_{xy} \sin^2 \theta$$

$$\text{For } \theta = \phi = 26.57^\circ: \alpha = -128.0 \times 10^{-6} \text{ rad}$$

Minus sign means line  $Od$  rotates clockwise (angle  $\phi$  decreases).

$$\Delta\phi = 128 \times 10^{-6} \text{ rad (decrease) } \leftarrow$$


(c) CHANGE IN ANGLE  $\psi$

Angle  $\psi$  increases the same amount that  $\phi$  decreases.

$$\Delta\psi = 128 \times 10^{-6} \text{ rad (increase) } \leftarrow$$

**Problem 7.7-2** Solve the preceding problem if  $b = 160$  mm,  $h = 60$  mm,  $\epsilon_x = 410 \times 10^{-6}$ , and  $\epsilon_y = -320 \times 10^{-6}$ .

**Solution 7.7-2 Plate in biaxial stress**

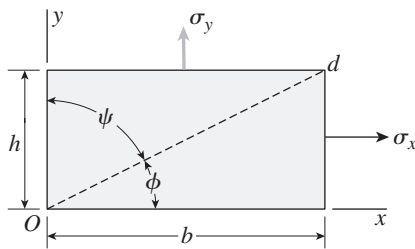

$$b = 160 \text{ mm} \quad h = 60 \text{ mm} \quad \epsilon_x = 410 \times 10^{-6}$$

$$\epsilon_y = -320 \times 10^{-6} \quad \gamma_{xy} = 0$$

$$\phi = \arctan \frac{h}{b} = 20.56^\circ$$

$$L_d = \sqrt{b^2 + h^2} = 170.88 \text{ mm}$$

(a) INCREASE IN LENGTH OF DIAGONAL

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$\text{For } \theta = \phi = 20.56^\circ: \epsilon_{x_1} = 319.97 \times 10^{-6}$$

$$\Delta d = \epsilon_{x_1} L_d = 0.0547 \text{ mm} \quad \leftarrow$$

(b) CHANGE IN ANGLE  $\phi$

$$\text{Eq. (7-68): } \alpha = -(\epsilon_x - \epsilon_y) \sin \theta \cos \theta - \gamma_{xy} \sin^2 \theta$$

$$\text{For } \theta = \phi = 20.56^\circ: \alpha = -240.0 \times 10^{-6} \text{ rad}$$

Minus sign means line  $Od$  rotates clockwise (angle  $\phi$  decreases).

$$\Delta\phi = 240 \times 10^{-6} \text{ rad (decrease) } \leftarrow$$


(c) CHANGE IN ANGLE  $\psi$

Angle  $\psi$  increases the same amount that  $\phi$  decreases.


$$\Delta\psi = 240 \times 10^{-6} \text{ rad (increase) } \leftarrow$$

**Problem 7.7-3** A thin square plate in *biaxial stress* is subjected to stresses  $\sigma_x$  and  $\sigma_y$ , as shown in part (a) of the figure. The width of the plate is  $b = 12.0$  in. Measurements show that the normal strains in the  $x$  and  $y$  directions are  $\epsilon_x = 427 \times 10^{-6}$  and  $\epsilon_y = 113 \times 10^{-6}$ , respectively.

With reference to part (b) of the figure, which shows a two-dimensional view of the plate, determine the following quantities: (a) the increase  $\Delta d$  in the length of diagonal  $Od$ ; (b) the change  $\Delta\phi$  in the angle  $\phi$  between diagonal  $Od$  and the  $x$  axis; and (c) the shear strain  $\gamma$  associated with diagonals  $Od$  and  $cf$  (that is, find the decrease in angle  $ced$ ).

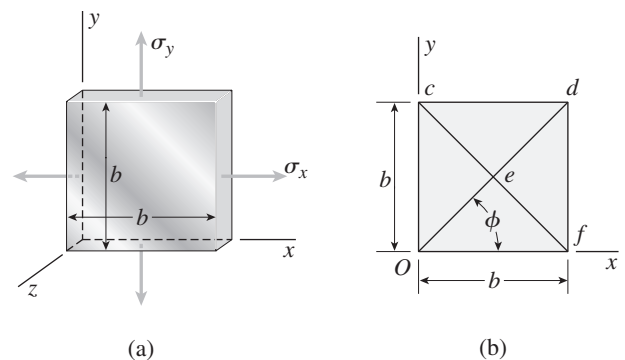

**Probs. 7.7-3 and 7.7-4**

**Solution 7.7-3 Square plate in biaxial stress**

$$b = 12.0 \text{ in.} \quad \epsilon_x = 427 \times 10^{-6}$$

$$\epsilon_y = 113 \times 10^{-6}$$

$$\phi = 45^\circ \quad \gamma_{xy} = 0$$

$$L_d = b\sqrt{2} = 16.97 \text{ in.}$$

(a) INCREASE IN LENGTH OF DIAGONAL

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$\text{For } \theta = \phi = 45^\circ: \epsilon_{x_1} = 270 \times 10^{-6}$$

$$\Delta d = \epsilon_{x_1} L_d = 0.00458 \text{ in.} \quad \leftarrow$$

(b) CHANGE IN ANGLE  $\phi$ 

$$\text{Eq. (7-68): } \alpha = -(\epsilon_x - \epsilon_y) \sin \theta \cos \theta - \gamma_{xy} \sin^2 \theta$$

$$\text{For } \theta = \phi = 45^\circ: \alpha = -157 \times 10^{-6} \text{ rad}$$

Minus sign means line  $Od$  rotates clockwise (angle  $\phi$  decreases).

$$\Delta \phi = 157 \times 10^{-6} \text{ rad (decrease)} \quad \leftarrow$$

(c) SHEAR STRAIN BETWEEN DIAGONALS


$$\text{Eq. (7-71b): } \frac{\gamma_{x_1 y_1}}{2} = -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta$$

$$\text{For } \theta = \phi = 45^\circ: \gamma_{x_1 y_1} = -314 \times 10^{-6} \text{ rad}$$

(Negative strain means angle  $cOd$  increases)

$$\gamma = -314 \times 10^{-6} \text{ rad} \quad \leftarrow$$

**Problem 7.7-4** Solve the preceding problem if  $b = 225 \text{ mm}$ ,  $\epsilon_x = 845 \times 10^{-6}$ , and  $\epsilon_y = 211 \times 10^{-6}$ .

**Solution 7.7-4 Square plate in biaxial stress**

$$b = 225 \text{ mm} \quad \epsilon_x = 845 \times 10^{-6}$$

$$\epsilon_y = 211 \times 10^{-6} \quad \phi = 45^\circ \quad \gamma_{xy} = 0$$

$$L_d = b\sqrt{2} = 318.2 \text{ mm}$$

(a) INCREASE IN LENGTH OF DIAGONAL

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$\text{For } \theta = \phi = 45^\circ: \epsilon_{x_1} = 528 \times 10^{-6}$$

$$\Delta d = \epsilon_{x_1} L_d = 0.168 \text{ mm} \quad \leftarrow$$

(b) CHANGE IN ANGLE  $\phi$ 

$$\text{Eq. (7-68): } \alpha = -(\epsilon_x - \epsilon_y) \sin \theta \cos \theta - \gamma_{xy} \sin^2 \theta$$

$$\text{For } \theta = \phi = 45^\circ: \alpha = -317 \times 10^{-6} \text{ rad}$$

Minus sign means line  $Od$  rotates clockwise (angle  $\phi$  decreases).

$$\Delta \phi = 317 \times 10^{-6} \text{ rad (decrease)} \quad \leftarrow$$

(c) SHEAR STRAIN BETWEEN DIAGONALS

$$\text{Eq. (7-71b): } \frac{\gamma_{x_1 y_1}}{2} = -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta$$


$$\text{For } \theta = \phi = 45^\circ: \gamma_{x_1 y_1} = -634 \times 10^{-6} \text{ rad}$$

(Negative strain means angle  $cOd$  increases)

$$\gamma = -634 \times 10^{-6} \text{ rad} \quad \leftarrow$$


**Problem 7.7-5** An element of material subjected to *plane strain* (see figure) has strains as follows:  $\epsilon_x = 220 \times 10^{-6}$ ,  $\epsilon_y = 480 \times 10^{-6}$ , and  $\gamma_{xy} = 180 \times 10^{-6}$ .

Calculate the strains for an element oriented at an angle  $\theta = 50^\circ$  and show these strains on a sketch of a properly oriented element.

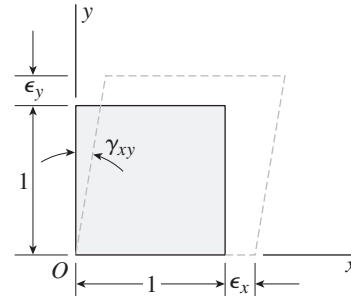

Probs. 7.7-5 through 7.7-10

**Solution 7.7-5 Element in plane strain**

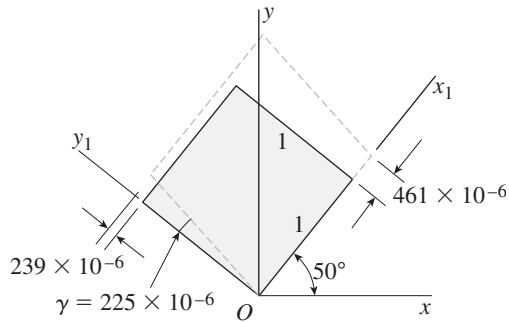


$$\begin{aligned}\epsilon_x &= 220 \times 10^{-6} & \epsilon_y &= 480 \times 10^{-6} \\ \gamma_{xy} &= 180 \times 10^{-6} \\ \epsilon_{x_1} &= \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \\ \frac{\gamma_{x_1 y_1}}{2} &= -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta \\ \epsilon_{y_1} &= \epsilon_x + \epsilon_y - \epsilon_{x_1} \\ \text{FOR } \theta &= 50^\circ: \\ \epsilon_{x_1} &= 461 \times 10^{-6} & \gamma_{x_1 y_1} &= 225 \times 10^{-6} \\ \epsilon_{y_1} &= 239 \times 10^{-6}\end{aligned}$$

**Problem 7.7-6** Solve the preceding problem for the following data:

$\epsilon_x = 420 \times 10^{-6}$ ,  $\epsilon_y = -170 \times 10^{-6}$ ,  $\gamma_{xy} = 310 \times 10^{-6}$ , and  $\theta = 37.5^\circ$ .

**Solution 7.7-6 Element in plane strain**

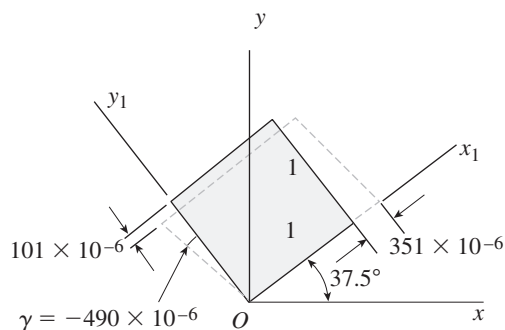

$$\begin{aligned}\epsilon_x &= 420 \times 10^{-6} & \epsilon_y &= -170 \times 10^{-6} \\ \gamma_{xy} &= 310 \times 10^{-6} \\ \epsilon_{x_1} &= \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \\ \frac{\gamma_{x_1 y_1}}{2} &= -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta \\ \epsilon_{y_1} &= \epsilon_x + \epsilon_y - \epsilon_{x_1} \\ \text{FOR } \theta &= 37.5^\circ: \\ \epsilon_{x_1} &= 351 \times 10^{-6} & \gamma_{x_1 y_1} &= -490 \times 10^{-6} \\ \epsilon_{y_1} &= -101 \times 10^{-6}\end{aligned}$$

**Problem 7.7-7** The strains for an element of material in *plane strain* (see figure) are as follows:  $\epsilon_x = 480 \times 10^{-6}$ ,  $\epsilon_y = 140 \times 10^{-6}$ , and  $\gamma_{xy} = -350 \times 10^{-6}$ .

Determine the principal strains and maximum shear strains, and show these strains on sketches of properly oriented elements.

**Solution 7.7-7 Element in plane strain**

$$\epsilon_x = 480 \times 10^{-6} \quad \epsilon_y = 140 \times 10^{-6}$$

$$\gamma_{xy} = -350 \times 10^{-6}$$

PRINCIPAL STRAINS

$$\epsilon_{1,2} = \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 310 \times 10^{-6} \pm 244 \times 10^{-6}$$

$$\epsilon_1 = 554 \times 10^{-6} \quad \epsilon_2 = 66 \times 10^{-6}$$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\epsilon_x - \epsilon_y} = -1.0294$$

$$2\theta_p = -45.8^\circ \text{ and } 134.2^\circ$$

$$\theta_p = -22.9^\circ \text{ and } 57.1^\circ$$


For  $\theta_p = -22.9^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= 554 \times 10^{-6}$$

$$\therefore \theta_{p_1} = -22.9^\circ \quad \epsilon_1 = 554 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 67.1^\circ \quad \epsilon_2 = 66 \times 10^{-6} \quad \leftarrow$$

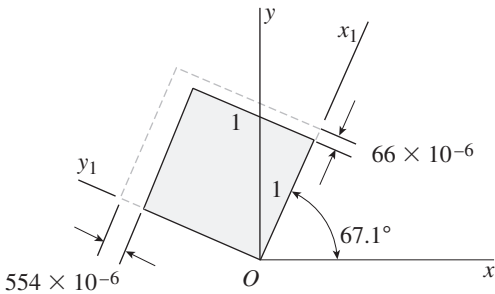

MAXIMUM SHEAR STRAINS

$$\frac{\gamma_{\max}}{2} = \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 244 \times 10^{-6}$$

$$\gamma_{\max} = 488 \times 10^{-6}$$


$$\theta_{s_1} = \theta_{p_1} - 45^\circ = -67.9^\circ \text{ or } 112.1^\circ$$

$$\gamma_{\max} = 488 \times 10^{-6} \quad \leftarrow$$

$$\theta_{s_2} = \theta_{s_1} + 90^\circ = 22.1^\circ$$

$$\gamma_{\min} = -488 \times 10^{-6} \quad \leftarrow$$

$$\epsilon_{\text{aver}} = \frac{\epsilon_x + \epsilon_y}{2} = 310 \times 10^{-6}$$

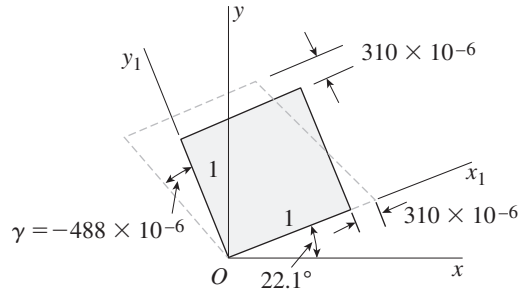

**Problem 7.7-8** Solve the preceding problem for the following strains:

$$\epsilon_x = 120 \times 10^{-6}, \quad \epsilon_y = -450 \times 10^{-6}, \quad \text{and} \quad \gamma_{xy} = -360 \times 10^{-6}.$$

**Solution 7.7-8 Element in plane strain**

$$\epsilon_x = 120 \times 10^{-6} \quad \epsilon_y = -450 \times 10^{-6}$$

$$\gamma_{xy} = -360 \times 10^{-6}$$

PRINCIPAL STRAINS

$$\epsilon_{1,2} = \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= -165 \times 10^{-6} \pm 377 \times 10^{-6}$$

$$\epsilon_1 = 172 \times 10^{-6} \quad \epsilon_2 = -502 \times 10^{-6}$$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\epsilon_x - \epsilon_y} = -0.6316$$

$$2\theta_p = 327.7^\circ \text{ and } 147.7^\circ$$

$$\theta_p = 163.9^\circ \text{ and } 73.9^\circ$$


For  $\theta_p = 163.9^\circ$ :


$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= 172 \times 10^{-6}$$

$$\therefore \theta_{p_1} = 163.9^\circ \quad \epsilon_1 = 172 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 73.9^\circ \quad \epsilon_2 = -502 \times 10^{-6} \quad \leftarrow$$

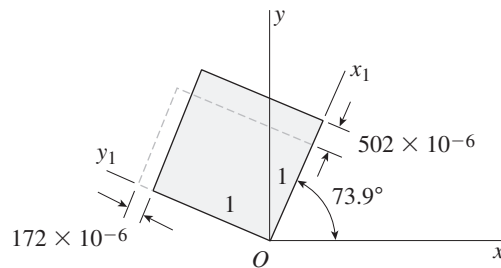

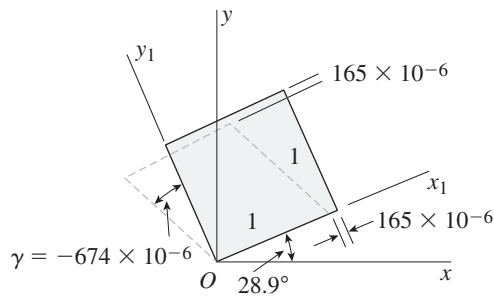

## MAXIMUM SHEAR STRAINS

$$\frac{\gamma_{\max}}{2} = \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 337 \times 10^{-6}$$

$$\gamma_{\max} = 674 \times 10^{-6}$$

$$\theta_{s_1} = \theta_{p_1} - 45^\circ = 118.9^\circ$$

$$\gamma_{\max} = 674 \times 10^{-6} \quad \leftarrow$$

$$\theta_{s_2} = \theta_{s_1} - 90^\circ = 26.9^\circ$$

$$\gamma_{\min} = -674 \times 10^{-6} \quad \leftarrow$$

$$\epsilon_{\text{aver}} = \frac{\epsilon_x + \epsilon_y}{2} = -165 \times 10^{-6}$$

**Problem 7.7-9** An element of material in plane strain

(see figure) is subjected to strains  $\epsilon_x = 480 \times 10^{-6}$ ,

$\epsilon_y = 70 \times 10^{-6}$ , and  $\gamma_{xy} = 420 \times 10^{-6}$ .

Determine the following quantities: (a) the strains for an element oriented at an angle  $\theta = 75^\circ$ , (b) the principal strains, and (c) the maximum shear strains. Show the results on sketches of properly oriented elements.

**Solution 7.7-9** Element in plane strain

$$\epsilon_x = 480 \times 10^{-6} \quad \epsilon_y = 70 \times 10^{-6}$$

$$\gamma_{xy} = 420 \times 10^{-6}$$

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$


$$\frac{\gamma_{x_1 y_1}}{2} = -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta$$

$$\epsilon_{y_1} = \epsilon_x + \epsilon_y - \epsilon_{x_1}$$

FOR  $\theta = 75^\circ$ :

$$\epsilon_{x_1} = 202 \times 10^{-6} \quad \gamma_{x_1 y_1} = -569 \times 10^{-6}$$

$$\epsilon_{y_1} = 348 \times 10^{-6}$$

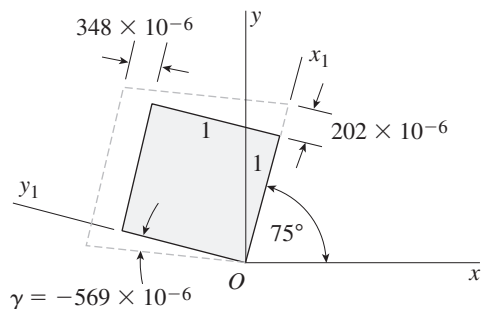

## PRINCIPAL STRAINS

$$\epsilon_{1,2} = \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 275 \times 10^{-6} \pm 293 \times 10^{-6}$$

$$\epsilon_1 = 568 \times 10^{-6} \quad \epsilon_2 = -18 \times 10^{-6}$$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\epsilon_x - \epsilon_y} = 1.0244$$

$$2\theta_p = 45.69^\circ \text{ and } 225.69^\circ$$

$$\theta_p = 22.85^\circ \text{ and } 112.85^\circ$$


For  $\theta_p = 22.85^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= 568 \times 10^{-6}$$

$$\therefore \theta_{p_1} = 22.8^\circ \quad \epsilon_1 = 568 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 112.8^\circ \quad \epsilon_2 = -18 \times 10^{-6} \quad \leftarrow$$

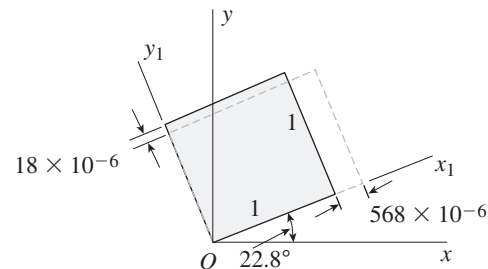

MAXIMUM SHEAR STRAINS

$$\frac{\gamma_{\max}}{2} = \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} = 293 \times 10^{-6}$$

$$\gamma_{\max} = 587 \times 10^{-6}$$


$$\theta_{s_1} = \theta_{p_1} - 45^\circ = -22.2^\circ \text{ or } 157.8^\circ$$

$$\gamma_{\max} = 587 \times 10^{-6} \quad \leftarrow$$

$$\theta_{s_2} = \theta_{s_1} + 90^\circ = 67.8^\circ$$

$$\gamma_{\min} = -587 \times 10^{-6} \quad \leftarrow$$

$$\epsilon_{\text{aver}} = \frac{\epsilon_x + \epsilon_y}{2} = 275 \times 10^{-6}$$

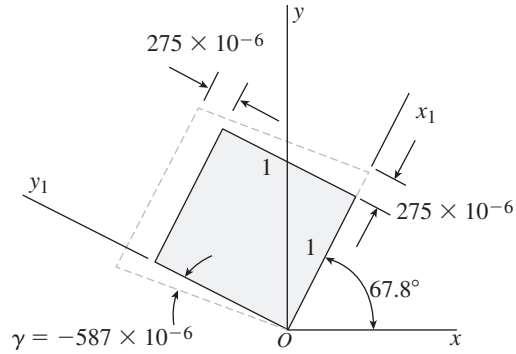

**Problem 7.7-10** Solve the preceding problem for the following data:  $\epsilon_x = -1120 \times 10^{-6}$ ,  $\epsilon_y = -430 \times 10^{-6}$ ,  $\gamma_{xy} = 780 \times 10^{-6}$ , and  $\theta = 45^\circ$ .

**Solution 7.7-10 Element in plane strain**

$$\epsilon_x = -1120 \times 10^{-6} \quad \epsilon_y = -430 \times 10^{-6}$$

$$\gamma_{xy} = 780 \times 10^{-6}$$

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$



$$\frac{\gamma_{x_1 y_1}}{2} = -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta$$

$$\epsilon_{y_1} = \epsilon_x + \epsilon_y - \epsilon_{x_1}$$

FOR  $\theta = 45^\circ$ :

$$\epsilon_{x_1} = -385 \times 10^{-6} \quad \gamma_{x_1 y_1} = 690 \times 10^{-6}$$

$$\epsilon_{y_1} = -1165 \times 10^{-6}$$

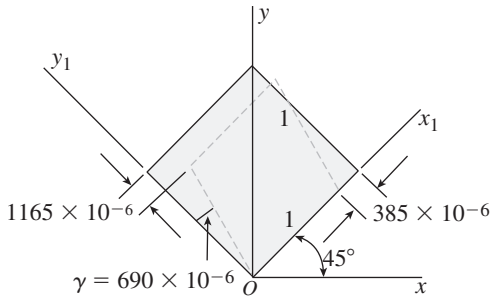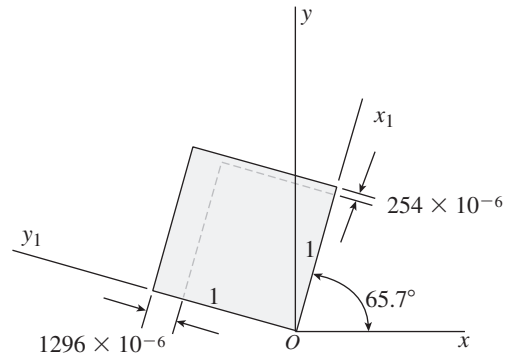

PRINCIPAL STRAINS

$$\epsilon_{1,2} = \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= -775 \times 10^{-6} \pm 521 \times 10^{-6}$$

$$\epsilon_1 = -254 \times 10^{-6} \quad \epsilon_2 = -1296 \times 10^{-6}$$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\epsilon_x - \epsilon_y} = -1.1304$$

$$2\theta_p = 131.5^\circ \text{ and } 311.5^\circ$$

$$\theta_p = 65.7^\circ \text{ and } 155.7^\circ$$

For  $\theta_p = 65.7^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= -254 \times 10^{-6}$$

$$\therefore \theta_{p_1} = 65.7^\circ \quad \epsilon_1 = -254 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 155.7^\circ \quad \epsilon_2 = -1296 \times 10^{-6} \quad \leftarrow$$

MAXIMUM SHEAR STRAINS

$$\frac{\gamma_{\max}}{2} = \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 521 \times 10^{-6}$$

$$\gamma_{\max} = 1041 \times 10^{-6}$$


$$\theta_{s_1} = \theta_{p_1} - 45^\circ = 20.7^\circ$$

$$\gamma_{\max} = 1041 \times 10^{-6} \quad \leftarrow$$

$$\theta_{s_2} = \theta_{s_1} + 90^\circ = 110.7^\circ$$


$$\gamma_{\min} = -1041 \times 10^{-6} \quad \leftarrow$$

$$\epsilon_{\text{aver}} = \frac{\epsilon_x + \epsilon_y}{2} = -775 \times 10^{-6}$$

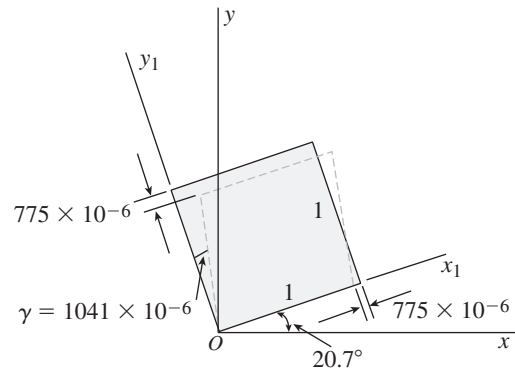

**Problem 7.7-11** A steel plate with modulus of elasticity  $E = 30 \times 10^6$  psi and Poisson's ratio  $\nu = 0.30$  is loaded in *biaxial stress* by normal stresses  $\sigma_x$  and  $\sigma_y$  (see figure). A strain gage is bonded to the plate at an angle  $\phi = 30^\circ$ .

If the stress  $\sigma_x$  is 18,000 psi and the strain measured by the gage is  $\epsilon = 407 \times 10^{-6}$ , what is the maximum in-plane shear stress  $(\tau_{\max})_{xy}$  and shear strain  $(\gamma_{\max})_{xy}$ ? What is the maximum shear strain  $(\gamma_{\max})_{xz}$  in the  $xz$  plane? What is the maximum shear strain  $(\gamma_{\max})_{yz}$  in the  $yz$  plane?



Probs. 7.7-11 and 7.7-12

### Solution 7.7-11 Steel plate in biaxial stress

$$\begin{aligned}\sigma_x &= 18,000 \text{ psi} & \gamma_{xy} &= 0 & \sigma_y &= ? \\ E &= 30 \times 10^6 \text{ psi} & \nu &= 0.30 \\ \text{Strain gage: } \phi &= 30^\circ & \epsilon &= 407 \times 10^{-6}\end{aligned}$$

UNITS: All stresses in psi.

STRAIN IN BIAxIAL STRESS (EQS. 7-39)

$$\epsilon_x = \frac{1}{E}(\sigma_x - \nu\sigma_y) = \frac{1}{30 \times 10^6}(18,000 - 0.3\sigma_y) \quad (1)$$

$$\epsilon_y = \frac{1}{E}(\sigma_y - \nu\sigma_x) = \frac{1}{30 \times 10^6}(\sigma_y - 5400) \quad (2)$$

$$\epsilon_z = -\frac{\nu}{E}(\sigma_x + \sigma_y) = -\frac{0.3}{30 \times 10^6}(18,000 + \sigma_y) \quad (3)$$

STRAINS AT ANGLE  $\phi = 30^\circ$  (Eq. 7-71a)

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$\begin{aligned}407 \times 10^{-6} &= \left(\frac{1}{2}\right)\left(\frac{1}{30 \times 10^6}\right)(12,600 + 0.7\sigma_y) \\ &+ \left(\frac{1}{2}\right)\left(\frac{1}{30 \times 10^6}\right)(23,400 - 1.3\sigma_y) \cos 60^\circ\end{aligned}$$

$$\text{Solve for } \sigma_y: \quad \sigma_y = 2400 \text{ psi} \quad (4)$$

MAXIMUM IN-PLANE SHEAR STRESS

$$(\tau_{\max})_{xy} = \frac{\sigma_x - \sigma_y}{2} = 7800 \text{ psi} \quad \leftarrow$$

STRAINS FROM EQS. (1), (2), AND (3)

$$\begin{aligned}\epsilon_x &= 576 \times 10^{-6} & \epsilon_y &= -100 \times 10^{-6} \\ \epsilon_z &= -204 \times 10^{-6}\end{aligned}$$

MAXIMUM SHEAR STRAINS (EQ. 7-75)

$$\text{xy plane: } \frac{(\gamma_{\max})_{xy}}{2} = \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$\gamma_{xy} = 0 \quad (\gamma_{\max})_{xy} = 676 \times 10^{-6} \quad \leftarrow$$

$$\text{xz plane: } \frac{(\gamma_{\max})_{xz}}{2} = \sqrt{\left(\frac{\epsilon_x - \epsilon_z}{2}\right)^2 + \left(\frac{\gamma_{xz}}{2}\right)^2}$$

$$\gamma_{xz} = 0 \quad (\gamma_{\max})_{xz} = 780 \times 10^{-6} \quad \leftarrow$$

$$\text{yz plane: } \frac{(\gamma_{\max})_{yz}}{2} = \sqrt{\left(\frac{\epsilon_y - \epsilon_z}{2}\right)^2 + \left(\frac{\gamma_{yz}}{2}\right)^2}$$

$$\gamma_{yz} = 0 \quad (\gamma_{\max})_{yz} = 104 \times 10^{-6} \quad \leftarrow$$

**Problem 7.7-12** Solve the preceding problem if the plate is made of aluminum with  $E = 72$  GPa and  $\nu = 1/3$ , the stress  $\sigma_x$  is 86.4 MPa, the angle  $\phi$  is  $21^\circ$ , and the strain  $\epsilon$  is  $946 \times 10^{-6}$ .

### Solution 7.7-12 Aluminum plate in biaxial stress

$$\begin{aligned}\sigma_x &= 86.4 \text{ MPa} & \gamma_{xy} &= 0 & \sigma_y &= ? \\ E &= 72 \text{ GPa} & \nu &= 1/3 \\ \text{Strain gage: } \phi &= 21^\circ & \epsilon &= 946 \times 10^{-6}\end{aligned}$$

UNITS: All stresses in MPa.

STRAINS IN BIAxIAL STRESS (EQS. 7-39)

$$\epsilon_x = \frac{1}{E}(\sigma_x - \nu\sigma_y) = \frac{1}{72,000}\left(86.4 - \frac{1}{3}\sigma_y\right) \quad (1)$$

$$\epsilon_y = \frac{1}{E}(\sigma_y - \nu\sigma_x) = \frac{1}{72,000}(\sigma_y - 28.8) \quad (2)$$

$$\epsilon_z = -\frac{\nu}{E}(\sigma_x + \sigma_y) = -\frac{1/3}{72,000}(86.4 + \sigma_y) \quad (3)$$



STRAINS AT ANGLE  $\phi = 21^\circ$  (EQ. 7-71a)

$$\begin{aligned} \epsilon_{x_1} &= \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \\ 946 \times 10^{-6} &= \left(\frac{1}{2}\right)\left(\frac{1}{72,000}\right)\left(57.6 + \frac{2}{3}\sigma_y\right) \\ &\quad + \left(\frac{1}{2}\right)\left(\frac{1}{72,000}\right)\left(115.2 - \frac{4}{3}\sigma_y\right) \cos 42^\circ \end{aligned}$$

Solve for  $\sigma_y$ :  $\sigma_y = 21.55 \text{ MPa}$  (4)

MAXIMUM IN-PLANE SHEAR STRESS

$$(\tau_{\max})_{xy} = \frac{\sigma_x - \sigma_y}{2} = 32.4 \text{ MPa} \quad \leftarrow$$

STRAINS FROM EQS. (1), (2), AND (3)


$$\begin{aligned} \epsilon_x &= 1100 \times 10^{-6} & \epsilon_y &= -101 \times 10^{-6} \\ \epsilon_z &= -500 \times 10^{-6} \end{aligned}$$

MAXIMUM SHEAR STRAINS (EQ. 7-75)

$$\begin{aligned} \text{xy plane: } \frac{(\gamma_{\max})_{xy}}{2} &= \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} \\ \gamma_{xy} &= 0 & (\gamma_{\max})_{xy} &= 1200 \times 10^{-6} \quad \leftarrow \\ \text{xz plane: } \frac{(\gamma_{\max})_{xz}}{2} &= \sqrt{\left(\frac{\epsilon_x - \epsilon_z}{2}\right)^2 + \left(\frac{\gamma_{xz}}{2}\right)^2} \\ \gamma_{xz} &= 0 & (\gamma_{\max})_{xz} &= 1600 \times 10^{-6} \quad \leftarrow \\ \text{yz plane: } \frac{(\gamma_{\max})_{yz}}{2} &= \sqrt{\left(\frac{\epsilon_y - \epsilon_z}{2}\right)^2 + \left(\frac{\gamma_{yz}}{2}\right)^2} \\ \gamma_{yz} &= 0 & (\gamma_{\max})_{yz} &= 399 \times 10^{-6} \quad \leftarrow \end{aligned}$$


**Problem 7.7-13** An element in *plane stress* is subjected to stresses  $\sigma_x = -8400 \text{ psi}$ ,  $\sigma_y = 1100 \text{ psi}$ , and  $\tau_{xy} = -1700 \text{ psi}$  (see figure). The material is aluminum with modulus of elasticity  $E = 10,000 \text{ ksi}$  and Poisson's ratio  $\nu = 0.33$ .

Determine the following quantities: (a) the strains for an element oriented at an angle  $\theta = 30^\circ$ , (b) the principal strains, and (c) the maximum shear strains. Show the results on sketches of properly oriented elements.



Probs. 7.7-13 and 7.7-14

**Solution 7.7-13 Element in plane stress**

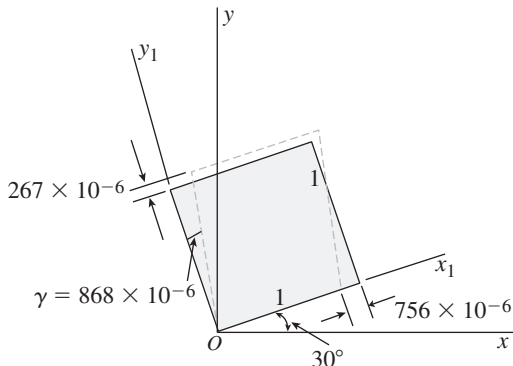

$$\begin{aligned} \sigma_x &= -8400 \text{ psi} & \sigma_y &= 1100 \text{ psi} \\ \tau_{xy} &= -1700 \text{ psi} & E &= 10,000 \text{ ksi} & \nu &= 0.33 \end{aligned}$$

HOOKE'S LAW (EQS. 7.34 AND 7.35)

$$\begin{aligned} \epsilon_x &= \frac{1}{E}(\sigma_x - \nu\sigma_y) = -876.3 \times 10^{-6} \\ \epsilon_y &= \frac{1}{E}(\sigma_y - \nu\sigma_x) = 387.2 \times 10^{-6} \\ \gamma_{xy} &= \frac{\tau_{xy}}{G} = \frac{2\tau_{xy}(1 + \nu)}{E} = -452.2 \times 10^{-6} \end{aligned}$$

FOR  $\theta = 30^\circ$ :

$$\begin{aligned} \epsilon_{x_1} &= \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \\ &= -756 \times 10^{-6} \\ \frac{\gamma_{x_1y_1}}{2} &= -\frac{\epsilon_x - \epsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta \\ &= 434 \times 10^{-6} \\ \gamma_{x_1y_1} &= 868 \times 10^{-6} \\ \epsilon_{y_1} &= \epsilon_x + \epsilon_y - \epsilon_{x_1} = 267 \times 10^{-6} \end{aligned}$$

## PRINCIPAL STRAINS

$$\varepsilon_{1,2} = \frac{\varepsilon_x + \varepsilon_y}{2} \pm \sqrt{\left(\frac{\varepsilon_x - \varepsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= -245 \times 10^{-6} \pm 671 \times 10^{-6}$$

$$\varepsilon_1 = 426 \times 10^{-6} \quad \varepsilon_2 = -916 \times 10^{-6}$$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\varepsilon_x - \varepsilon_y} = 0.3579$$

$$2\theta_p = 19.7^\circ \text{ and } 199.7^\circ$$

$$\theta_p = 9.8^\circ \text{ and } 99.8^\circ$$


For  $\theta_p = 9.8^\circ$ :

$$\varepsilon_{x_1} = \frac{\varepsilon_x + \varepsilon_y}{2} + \frac{\varepsilon_x - \varepsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= -916 \times 10^{-6}$$

$$\therefore \theta_{p_1} = 99.8^\circ \quad \varepsilon_1 = 426 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 9.8^\circ \quad \varepsilon_2 = -916 \times 10^{-6} \quad \leftarrow$$

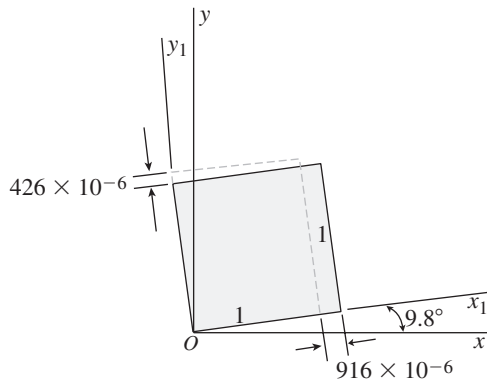

## MAXIMUM SHEAR STRAINS

$$\frac{\gamma_{\max}}{2} = \sqrt{\left(\frac{\varepsilon_x - \varepsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 671 \times 10^{-6}$$

$$\gamma_{\max} = 1342 \times 10^{-6}$$


$$\theta_{s_1} = \theta_{p_1} - 45^\circ = 54.8^\circ$$

$$\gamma_{\max} = 1342 \times 10^{-6} \quad \leftarrow$$

$$\theta_{s_2} = \theta_{s_1} + 90^\circ = 144.8^\circ$$

$$\gamma_{\min} = -1342 \times 10^{-6} \quad \leftarrow$$

$$\varepsilon_{\text{aver}} = \frac{\varepsilon_x + \varepsilon_y}{2} = -245 \times 10^{-6}$$

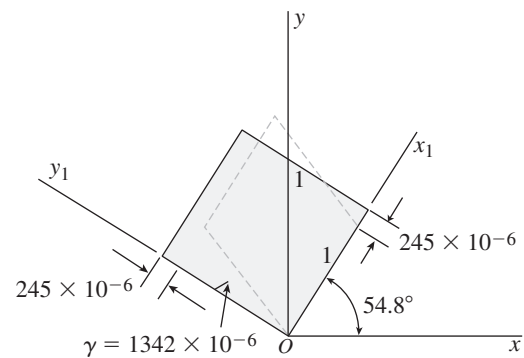

**Problem 7.7-14** Solve the preceding problem for the following data:  
 $\sigma_x = -150$  MPa,  $\sigma_y = -210$  MPa,  $\tau_{xy} = -16$  MPa, and  $\theta = 50^\circ$ . The  
 material is brass with  $E = 100$  GPa and  $\nu = 0.34$ .

**Solution 7.7-14** Element in plane stress

$$\sigma_x = -150 \text{ MPa} \quad \sigma_y = -210 \text{ MPa}$$

$$\tau_{xy} = 16 \text{ MPa} \quad E = 100 \text{ GPa} \quad \nu = 0.34$$

HOOKE'S LAW (EQS. 7.34 AND 7.35)

$$\varepsilon_x = \frac{1}{E}(\sigma_x - \nu\sigma_y) = -786 \times 10^{-6}$$

$$\varepsilon_y = \frac{1}{E}(\sigma_y - \nu\sigma_x) = -1590 \times 10^{-6}$$

$$\gamma_{xy} = \frac{\tau_{xy}}{G} = \frac{2\tau_{xy}(1+\nu)}{E} = -429 \times 10^{-6}$$

FOR  $\theta = 50^\circ$ :

$$\varepsilon_{x_1} = \frac{\varepsilon_x + \varepsilon_y}{2} + \frac{\varepsilon_x - \varepsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$


$$= -1469 \times 10^{-6}$$

$$\frac{\gamma_{x_1y_1}}{2} = -\frac{\varepsilon_x - \varepsilon_y}{2} \sin 2\theta + \frac{\gamma_{xy}}{2} \cos 2\theta$$

$$= -358.5 \times 10^{-6}$$


$$\gamma_{x_1y_1} = -717 \times 10^{-6}$$

$$\varepsilon_{y_1} = \varepsilon_x + \varepsilon_y - \varepsilon_{x_1} = -907 \times 10^{-6}$$

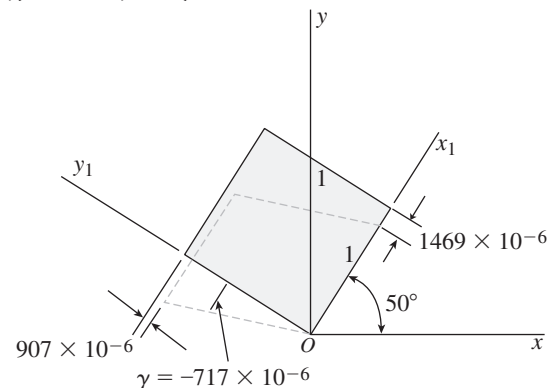


PRINCIPAL STRAINS

$$\begin{aligned} \epsilon_{1,2} &= \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} \\ &= -1188 \times 10^{-6} \pm 456 \times 10^{-6} \\ \epsilon_1 &= -732 \times 10^{-6} \quad \epsilon_2 = -1644 \times 10^{-6} \\ \tan 2\theta_p &= \frac{\gamma_{xy}}{\epsilon_x - \epsilon_y} = -0.5333 \\ 2\theta_p &= 151.9^\circ \text{ and } 331.9^\circ \\ \theta_p &= 76.0^\circ \text{ and } 166.0^\circ \\ \text{For } \theta_p = 76.0^\circ: \\ \epsilon_{x_1} &= \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \\ &= -1644 \times 10^{-6} \\ \therefore \theta_{p_1} &= 166.0^\circ \quad \epsilon_1 = -732 \times 10^{-6} \quad \leftarrow \\ \theta_{p_2} &= 76.0^\circ \quad \epsilon_2 = -1644 \times 10^{-6} \quad \leftarrow \end{aligned}$$

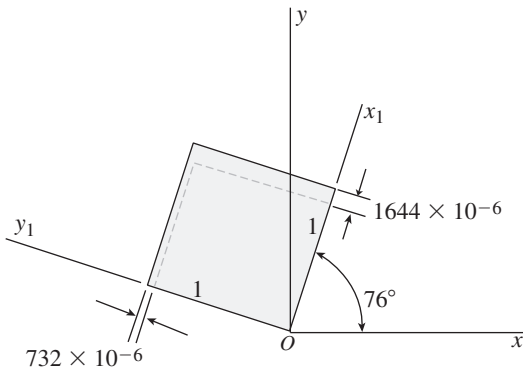


MAXIMUM SHEAR STRAINS

$$\begin{aligned} \frac{\gamma_{\max}}{2} &= \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} \\ &= 456 \times 10^{-6} \\ \gamma_{\max} &= 911 \times 10^{-6} \\ \theta_{s_1} &= \theta_{p_1} - 45^\circ = 121.0^\circ \\ \gamma_{\max} &= 911 \times 10^{-6} \quad \leftarrow \\ \theta_{s_2} &= \theta_{s_1} - 90^\circ = 31.0^\circ \\ \gamma_{\min} &= -911 \times 10^{-6} \quad \leftarrow \\ \epsilon_{\text{aver}} &= \frac{\epsilon_x + \epsilon_y}{2} = -1190 \times 10^{-6} \end{aligned}$$

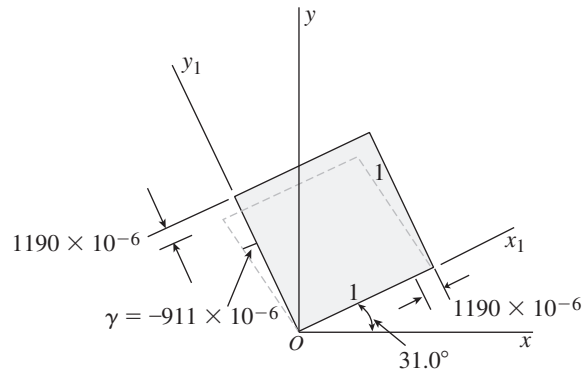

**Problem 7.7-15** During a test of an airplane wing, the strain gage readings from a 45° rosette (see figure) are as follows: gage A,  $520 \times 10^{-6}$ ; gage B,  $360 \times 10^{-6}$ ; and gage C,  $-80 \times 10^{-6}$ .

Determine the principal strains and maximum shear strains, and show them on sketches of properly oriented elements.



Probs. 7.7-15 and 7.7-16

**Solution 7.7-15** 45° strain rosette


$$\begin{aligned} \epsilon_A &= 520 \times 10^{-6} & \epsilon_B &= 360 \times 10^{-6} \\ \epsilon_C &= -80 \times 10^{-6} \end{aligned}$$

FROM EQS. (7-77) AND (7-78) OF EXAMPLE 7-8:

$$\begin{aligned} \epsilon_x &= \epsilon_A = 520 \times 10^{-6} & \epsilon_y &= \epsilon_C = -80 \times 10^{-6} \\ \gamma_{xy} &= 2\epsilon_B - \epsilon_A - \epsilon_C = 280 \times 10^{-6} \end{aligned}$$

PRINCIPAL STRAINS

$$\begin{aligned} \epsilon_{1,2} &= \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} \\ &= 220 \times 10^{-6} \pm 331 \times 10^{-6} \\ \epsilon_1 &= 551 \times 10^{-6} & \epsilon_2 &= -111 \times 10^{-6} \end{aligned}$$

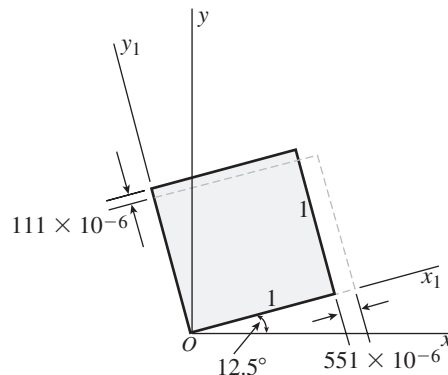

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\varepsilon_x - \varepsilon_y} = 0.4667$$

$$2\theta_p = 25.0^\circ \text{ and } 205.0^\circ$$

$$\theta_p = 12.5^\circ \text{ and } 102.5^\circ$$

For  $\theta_p = 12.5^\circ$ :

$$\varepsilon_{x_1} = \frac{\varepsilon_x + \varepsilon_y}{2} + \frac{\varepsilon_x - \varepsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= 551 \times 10^{-6}$$

$$\therefore \theta_{p_1} = 12.5^\circ \quad \varepsilon_1 = 551 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 102.5^\circ \quad \varepsilon_2 = -111 \times 10^{-6} \quad \leftarrow$$

MAXIMUM SHEAR STRAINS

$$\frac{\gamma_{\max}}{2} = \sqrt{\left(\frac{\varepsilon_x - \varepsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 331 \times 10^{-6}$$

$$\gamma_{\max} = 662 \times 10^{-6}$$


$$\theta_{s_1} = \theta_{p_1} - 45^\circ = -32.5^\circ \text{ or } 147.5^\circ$$

$$\gamma_{\max} = 662 \times 10^{-6} \quad \leftarrow$$

$$\theta_{s_2} = \theta_{s_1} + 90^\circ = 57.5^\circ$$

$$\gamma_{\min} = -662 \times 10^{-6} \quad \leftarrow$$

$$\varepsilon_{\text{aver}} = \frac{\varepsilon_x + \varepsilon_y}{2} = 220 \times 10^{-6}$$

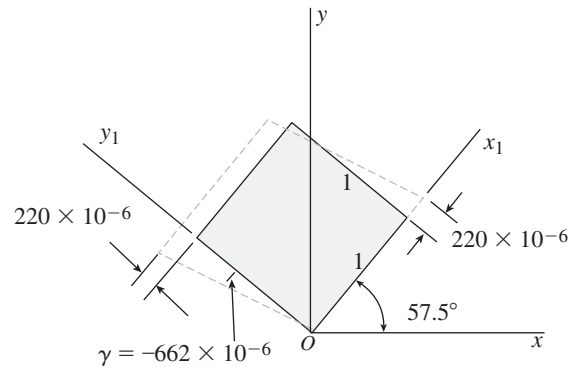

**Problem 7.7-16** A  $45^\circ$  strain rosette (see figure) mounted on the surface of an automobile frame gives the following readings: gage  $A$ ,  $310 \times 10^{-6}$ ; gage  $B$ ,  $180 \times 10^{-6}$ ; and gage  $C$ ,  $-160 \times 10^{-6}$ .

Determine the principal strains and maximum shear strains, and show them on sketches of properly oriented elements.

**Solution 7.7-16**  $45^\circ$  strain rosette

$$\varepsilon_A = 310 \times 10^{-6} \quad \varepsilon_B = 180 \times 10^{-6}$$

$$\varepsilon_C = -160 \times 10^{-6}$$

$$\therefore \theta_{p_1} = 12.0^\circ \quad \varepsilon_1 = 332 \times 10^{-6} \quad \leftarrow$$

$$\theta_{p_2} = 102.0^\circ \quad \varepsilon_2 = -182 \times 10^{-6} \quad \leftarrow$$

FROM EQS. (7-77) AND (7-78) OF EXAMPLE 7-8:

$$\varepsilon_x = \varepsilon_A = 310 \times 10^{-6} \quad \varepsilon_y = \varepsilon_C = -160 \times 10^{-6}$$

$$\gamma_{xy} = 2\varepsilon_B - \varepsilon_A - \varepsilon_C = 210 \times 10^{-6}$$

PRINCIPAL STRAINS

$$\varepsilon_{1,2} = \frac{\varepsilon_x + \varepsilon_y}{2} \pm \sqrt{\left(\frac{\varepsilon_x - \varepsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 75 \times 10^{-6} \pm 257 \times 10^{-6}$$

$$\varepsilon_1 = 332 \times 10^{-6} \quad \varepsilon_2 = -182 \times 10^{-6}$$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\varepsilon_x - \varepsilon_y} = 0.4468$$


$$2\theta_p = 24.1^\circ \text{ and } 204.1^\circ$$

$$\theta_p = 12.0^\circ \text{ and } 102.0^\circ$$

For  $\theta_p = 12.0^\circ$ :


$$\varepsilon_{x_1} = \frac{\varepsilon_x + \varepsilon_y}{2} + \frac{\varepsilon_x - \varepsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= 332 \times 10^{-6}$$

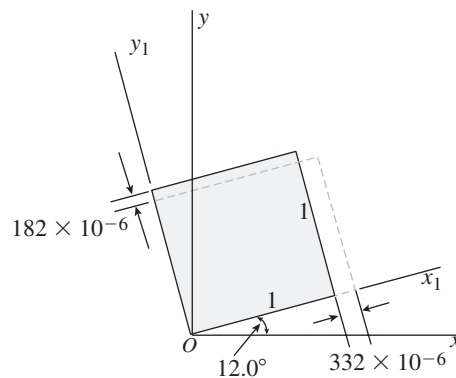


MAXIMUM SHEAR STRAINS

$$\begin{aligned} \frac{\gamma_{\max}}{2} &= \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} \\ &= 257 \times 10^{-6} \\ \gamma_{\max} &= 515 \times 10^{-6} \\ \theta_{s_1} &= \theta_{p_1} - 45^\circ = -33.0^\circ \text{ or } 147.0^\circ \\ \gamma_{\max} &= 515 \times 10^{-6} \quad \leftarrow \\ \theta_{s_2} &= \theta_{s_1} + 90^\circ = 57.0^\circ \\ \gamma_{\min} &= -515 \times 10^{-6} \quad \leftarrow \\ \epsilon_{\text{aver}} &= \frac{\epsilon_x + \epsilon_y}{2} = 75 \times 10^{-6} \end{aligned}$$

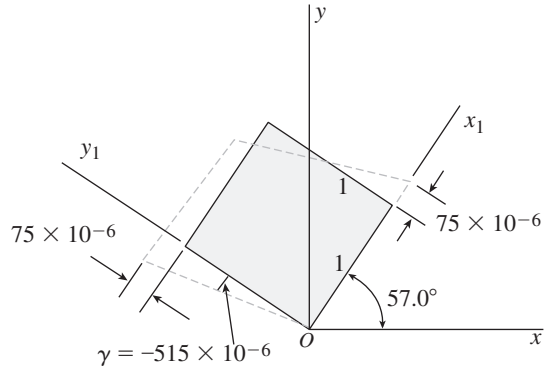

**Problem 7.7-17** A solid circular bar of diameter  $d = 1.5$  in. is subjected to an axial force  $P$  and a torque  $T$  (see figure). Strain gages  $A$  and  $B$  mounted on the surface of the bar give readings  $\epsilon_a = 100 \times 10^{-6}$  and  $\epsilon_b = -55 \times 10^{-6}$ . The bar is made of steel having  $E = 30 \times 10^6$  psi and  $\nu = 0.29$ .

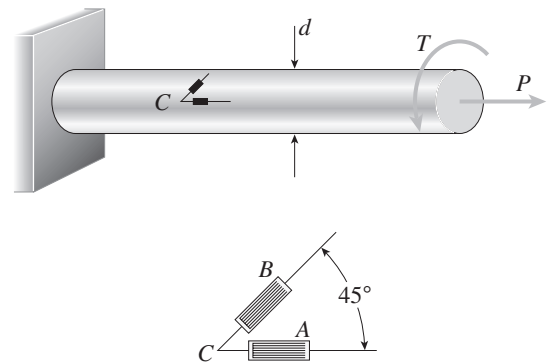

- (a) Determine the axial force  $P$  and the torque  $T$ .
- (b) Determine the maximum shear strain  $\gamma_{\max}$  and the maximum shear stress  $\tau_{\max}$  in the bar.

**Solution 7.7-17 Circular bar (plane stress)**

Bar is subjected to a torque  $T$  and an axial force  $P$ .  
 $E = 30 \times 10^6$  psi     $\nu = 0.29$   
 Diameter  $d = 1.5$  in.

STRAIN GAGES

At  $\theta = 0^\circ$ :     $\epsilon_A = \epsilon_x = 100 \times 10^{-6}$   
 At  $\theta = 45^\circ$ :     $\epsilon_B = -55 \times 10^{-6}$

ELEMENT IN PLANE STRESS

$$\begin{aligned} \sigma_x &= \frac{P}{A} = \frac{4P}{\pi d^2} & \sigma_y &= 0 & \tau_{xy} &= -\frac{16T}{\pi d^3} \\ \epsilon_x &= 100 \times 10^{-6} & \epsilon_y &= -\nu \epsilon_x = -29 \times 10^{-6} \end{aligned}$$

AXIAL FORCE  $P$

$$\epsilon_x = \frac{\sigma_x}{E} = \frac{4P}{\pi d^2 E} \quad P = \frac{\pi d^2 E \epsilon_x}{4} = 5300 \text{ lb} \quad \leftarrow$$

SHEAR STRAIN

$$\begin{aligned} \gamma_{xy} &= \frac{\tau_{xy}}{G} = \frac{2\tau_{xy}(1+\nu)}{E} = -\frac{32T(1+\nu)}{\pi d^3 E} \\ &= -(0.1298 \times 10^{-6})T \quad (T = \text{lb-in.}) \end{aligned}$$

STRAIN AT  $\theta = 45^\circ$

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \quad (1)$$

$$\epsilon_{x_1} = \epsilon_B = -55 \times 10^{-6} \quad 2\theta = 90^\circ$$

Substitute numerical values into Eq. (1):

$$-55 \times 10^{-6} = 35.5 \times 10^{-6} - (0.0649 \times 10^{-6})T$$

Solve for  $T$ :     $T = 1390$  lb-in.     $\leftarrow$


MAXIMUM SHEAR STRAIN AND MAXIMUM SHEAR STRESS

$$\gamma_{xy} = -(0.1298 \times 10^{-6})T = -180.4 \times 10^{-6} \text{ rad}$$

$$\begin{aligned} \text{Eq. (7-75): } \frac{\gamma_{\max}}{2} &= \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2} \\ &= 111 \times 10^{-6} \text{ rad} \\ \gamma_{\max} &= 222 \times 10^{-6} \text{ rad} \quad \leftarrow \\ \tau_{\max} &= G\gamma_{\max} = 2580 \text{ psi} \quad \leftarrow \end{aligned}$$

**Problem 7.7-18** A cantilever beam of rectangular cross section (width  $b = 25$  mm, height  $h = 100$  mm) is loaded by a force  $P$  that acts at the midheight of the beam and is inclined at an angle  $\alpha$  to the vertical (see figure). Two strain gages are placed at point  $C$ , which also is at the midheight of the beam. Gage  $A$  measures the strain in the horizontal direction and gage  $B$  measures the strain at an angle  $\beta = 60^\circ$  to the horizontal. The measured strains are  $\epsilon_a = 125 \times 10^{-6}$  and  $\epsilon_b = -375 \times 10^{-6}$ .

Determine the force  $P$  and the angle  $\alpha$ , assuming the material is steel with  $E = 200$  GPa and  $\nu = 1/3$ .

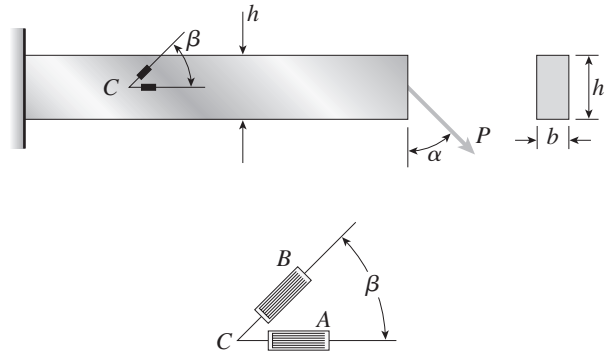

**Solution 7.7-18 Cantilever beam (plane stress)**

Beam loaded by a force  $P$  acting at an angle  $\alpha$ .

$$E = 200 \text{ GPa} \quad \nu = 1/3 \quad b = 25 \text{ mm}$$

$$h = 100 \text{ mm}$$

$$\text{Axial force } F = P \sin \alpha$$

$$\text{Shear force } V = P \cos \alpha$$

(At the neutral axis, the bending moment produces no stresses.)

**STRAIN GAGES**

$$\text{At } \theta = 0^\circ: \quad \epsilon_A = \epsilon_x = 125 \times 10^{-6}$$

$$\text{At } \theta = 60^\circ: \quad \epsilon_B = -375 \times 10^{-6}$$

**ELEMENT IN PLANE STRESS**

$$\sigma_x = \frac{F}{A} = \frac{P \sin \alpha}{bh} \quad \sigma_y = 0$$

$$\tau_{xy} = -\frac{3V}{2A} = -\frac{3P \cos \alpha}{2bh}$$

$$\epsilon_x = 125 \times 10^{-6} \quad \epsilon_y = -\nu \epsilon_x = -41.67 \times 10^{-6}$$

**HOOKE'S LAW**

$$\epsilon_x = \frac{\sigma_x}{E} = \frac{P \sin \alpha}{bhE}$$

$$P \sin \alpha = bhE \epsilon_x = 62,500 \text{ N} \quad (1)$$

$$\gamma_{xy} = \frac{\tau_{xy}}{G} = -\frac{3P \cos \alpha}{2bhG} = -\frac{3(1+\nu)P \cos \alpha}{bhE}$$

$$= -(8.0 \times 10^{-6})P \cos \alpha \quad (2)$$

FOR  $\theta = 60^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \quad (3)$$

$$\epsilon_{x_1} = \epsilon_B = -375 \times 10^{-6} \quad 2\theta = 120^\circ$$

Substitute into Eq. (3):

$$-375 \times 10^{-6} = 41.67 \times 10^{-6} - 41.67 \times 10^{-6} - (3.464 \times 10^{-6})P \cos \alpha$$

$$\text{or } P \cos \alpha = 108,260 \text{ N} \quad (4)$$

SOLVE EQS. (1) AND (4):

$$\tan \alpha = 0.5773 \quad \alpha = 30^\circ \quad \leftarrow$$

$$P = 125 \text{ kN} \quad \leftarrow$$

**Problem 7.7-19** Solve the preceding problem if the cross-sectional dimensions are  $b = 1.0$  in. and  $h = 3.0$  in., the gage angle is  $\beta = 75^\circ$ , the measured strains are  $\epsilon_a = 171 \times 10^{-6}$  and  $\epsilon_b = -266 \times 10^{-6}$ , and the material is a magnesium alloy with modulus  $E = 6.0 \times 10^6$  psi and Poisson's ratio  $\nu = 0.35$ .

**Solution 7.7-19 Cantilever beam (plane stress)**

Beam loaded by a force  $P$  acting at an angle  $\alpha$ .

$$E = 6.0 \times 10^6 \text{ psi} \quad \nu = 0.35 \quad b = 1.0 \text{ in.}$$

$$h = 3.0 \text{ in.}$$

$$\text{Axial force } F = P \sin \alpha \quad \text{Shear force } V = P \cos \alpha$$

(At the neutral axis, the bending moment produces no stresses.)

STRAIN GAGES

$$\text{At } \theta = 0^\circ: \quad \epsilon_A = \epsilon_x = 171 \times 10^{-6}$$

$$\text{At } \theta = 75^\circ: \quad \epsilon_B = -266 \times 10^{-6}$$

ELEMENT IN PLANE STRESS

$$\sigma_x = \frac{F}{A} = \frac{P \sin \alpha}{bh} \quad \sigma_y = 0$$

$$\tau_{xy} = -\frac{3V}{2A} = -\frac{3P \cos \alpha}{2bh}$$

$$\epsilon_x = 171 \times 10^{-6} \quad \epsilon_y = -\nu \epsilon_x = -59.85 \times 10^{-6}$$

HOOKE'S LAW

$$\epsilon_x = \frac{\sigma_x}{E} = \frac{P \sin \alpha}{bhE} \quad (1)$$

$$P \sin \alpha = bhE \epsilon_x = 3078 \text{ lb}$$

$$\gamma_{xy} = \frac{\tau_{xy}}{G} = -\frac{3P \cos \alpha}{2bhG} = -\frac{3(1 + \nu)P \cos \alpha}{bhE} \quad (2)$$

$$= -(225.0 \times 10^{-6})P \cos \alpha$$

FOR  $\theta = 75^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta \quad (3)$$

$$\epsilon_{x_1} = \epsilon_B = -266 \times 10^{-6} \quad 2\theta = 150^\circ$$

Substitute into Eq. (3):

$$-266 \times 10^{-6} = 55.575 \times 10^{-6} - 99.961 \times 10^{-6} - (56.25 \times 10^{-6})P \cos \alpha$$

$$\text{or } P \cos \alpha = 3939.8 \text{ lb} \quad (4)$$


SOLVE EQS. (1) AND (4):

$$\tan \alpha = 0.7813 \quad \alpha = 38^\circ \quad \leftarrow$$

$$P = 5000 \text{ lb} \quad \leftarrow$$

**Problem 7.7-20** A  $60^\circ$  strain rosette, or *delta rosette*, consists of three electrical-resistance strain gages arranged as shown in the figure. Gage  $A$  measures the normal strain  $\epsilon_a$  in the direction of the  $x$  axis. Gages  $B$  and  $C$  measure the strains  $\epsilon_b$  and  $\epsilon_c$  in the inclined directions shown.

Obtain the equations for the strains  $\epsilon_x$ ,  $\epsilon_y$ , and  $\gamma_{xy}$  associated with the  $xy$  axes.

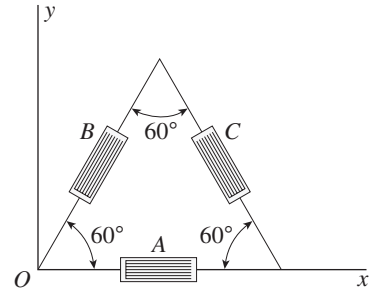

**Solution 7.7-20 Delta rosette ( $60^\circ$  strain rosette)**

STRAIN GAGES

$$\text{Gage } A \text{ at } \theta = 0^\circ \quad \text{Strain} = \epsilon_A$$

$$\text{Gage } B \text{ at } \theta = 60^\circ \quad \text{Strain} = \epsilon_B$$

$$\text{Gage } C \text{ at } \theta = 120^\circ \quad \text{Strain} = \epsilon_C$$

$$\text{FOR } \theta = 0^\circ: \quad \epsilon_x = \epsilon_A \quad \leftarrow$$

FOR  $\theta = 60^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$\epsilon_B = \frac{\epsilon_A + \epsilon_y}{2} + \frac{\epsilon_A - \epsilon_y}{2} (\cos 120^\circ) + \frac{\gamma_{xy}}{2} (\sin 120^\circ)$$

$$\epsilon_B = \frac{\epsilon_A}{4} + \frac{3\epsilon_y}{4} + \frac{\gamma_{xy}\sqrt{3}}{4} \quad (1)$$

FOR  $\theta = 120^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$\epsilon_C = \frac{\epsilon_A + \epsilon_y}{2} + \frac{\epsilon_A - \epsilon_y}{2} (\cos 240^\circ) + \frac{\gamma_{xy}}{2} (\sin 240^\circ)$$

$$\epsilon_C = \frac{\epsilon_A}{4} + \frac{3\epsilon_y}{4} - \frac{\gamma_{xy}\sqrt{3}}{4} \quad (2)$$


SOLVE EQS. (1) AND (2):

$$\epsilon_y = \frac{1}{3}(2\epsilon_B + 2\epsilon_C - \epsilon_A) \quad \leftarrow$$

$$\gamma_{xy} = \frac{2}{\sqrt{3}}(\epsilon_B - \epsilon_C) \quad \leftarrow$$

**Problem 7.7-21** On the surface of a structural component in a space vehicle, the strains are monitored by means of three strain gages arranged as shown in the figure. During a certain maneuver, the following strains were recorded:  $\epsilon_a = 1100 \times 10^{-6}$ ,  $\epsilon_b = 200 \times 10^{-6}$ , and  $\epsilon_c = 200 \times 10^{-6}$ .

Determine the principal strains and principal stresses in the material, which is a magnesium alloy for which  $E = 6000$  ksi and  $\nu = 0.35$ . (Show the principal strains and principal stresses on sketches of properly oriented elements.)

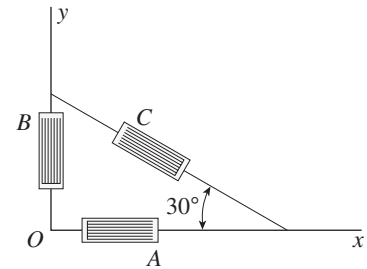

**Solution 7.7-21 30-60-90° strain rosette**

Magnesium alloy:  $E = 6000$  ksi  $\nu = 0.35$

STRAIN GAGES

Gage A at  $\theta = 0^\circ$   $\epsilon_A = 1100 \times 10^{-6}$

Gage B at  $\theta = 90^\circ$   $\epsilon_B = 200 \times 10^{-6}$

Gage C at  $\theta = 150^\circ$   $\epsilon_C = 200 \times 10^{-6}$

FOR  $\theta = 0^\circ$ :  $\epsilon_x = \epsilon_A = 1100 \times 10^{-6}$

FOR  $\theta = 90^\circ$ :  $\epsilon_y = \epsilon_B = 200 \times 10^{-6}$

FOR  $\theta = 150^\circ$ :

$$\epsilon_{x_1} = \epsilon_C = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$200 \times 10^{-6} = 650 \times 10^{-6} + 225 \times 10^{-6} - 0.43301\gamma_{xy}$$

Solve for  $\gamma_{xy}$ :  $\gamma_{xy} = 1558.9 \times 10^{-6}$

PRINCIPAL STRAINS

$$\epsilon_{1,2} = \frac{\epsilon_x + \epsilon_y}{2} \pm \sqrt{\left(\frac{\epsilon_x - \epsilon_y}{2}\right)^2 + \left(\frac{\gamma_{xy}}{2}\right)^2}$$

$$= 650 \times 10^{-6} \pm 900 \times 10^{-6}$$

$\epsilon_1 = 1550 \times 10^{-6}$   $\epsilon_2 = -250 \times 10^{-6}$

$$\tan 2\theta_p = \frac{\gamma_{xy}}{\epsilon_x - \epsilon_y} = \sqrt{3} = 1.7321$$

$2\theta_p = 60^\circ$   $\theta_p = 30^\circ$


For  $\theta_p = 30^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

$$= 1550 \times 10^{-6}$$

$\therefore \theta_{p_1} = 30^\circ$   $\epsilon_1 = 1550 \times 10^{-6}$  ←

$\theta_{p_2} = 120^\circ$   $\epsilon_2 = -250 \times 10^{-6}$  ←

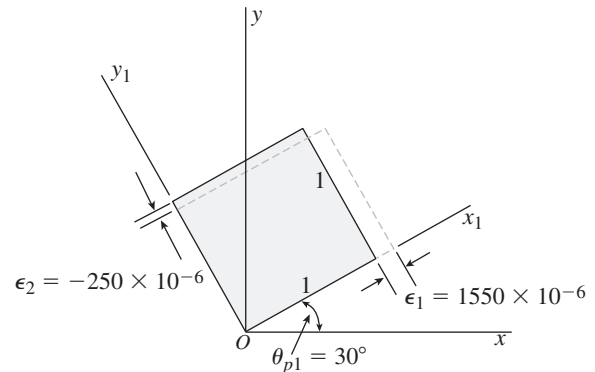


PRINCIPAL STRESSES (see Eqs. 7-36)

$$\sigma_1 = \frac{E}{1 - \nu^2}(\epsilon_1 + \nu\epsilon_2) \quad \sigma_2 = \frac{E}{1 - \nu^2}(\epsilon_2 + \nu\epsilon_1)$$

Substitute numerical values:


$\sigma_1 = 10,000$  psi  $\sigma_2 = 2,000$  psi ←





**Problem 7.7-22** The strains on the surface of an experimental device made of pure aluminum ( $E = 70 \text{ GPa}$ ,  $\nu = 0.33$ ) and tested in a space shuttle were measured by means of strain gages. The gages were oriented as shown in the figure, and the measured strains were  $\epsilon_a = 1100 \times 10^{-6}$ ,  $\epsilon_b = 1496 \times 10^{-6}$ , and  $\epsilon_c = -39.44 \times 10^{-6}$ .

What is the stress  $\sigma_x$  in the  $x$  direction?

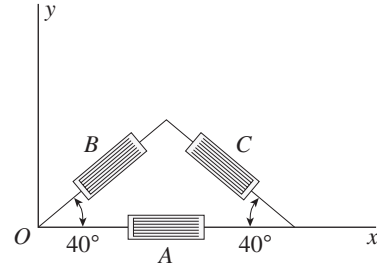

**Solution 7.7-22 40-40-100° strain rosette**

Pure aluminum:  $E = 70 \text{ GPa}$      $\nu = 0.33$

STRAIN GAGES

- Gage A at  $\theta = 0^\circ$      $\epsilon_A = 1100 \times 10^{-6}$
- Gage B at  $\theta = 40^\circ$      $\epsilon_B = 1496 \times 10^{-6}$
- Gage C at  $\theta = 140^\circ$      $\epsilon_C = -39.44 \times 10^{-6}$

FOR  $\theta = 0^\circ$ :     $\epsilon_x = \epsilon_A = 1100 \times 10^{-6}$

FOR  $\theta = 40^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

Substitute  $\epsilon_{x_1} = \epsilon_B = 1496 \times 10^{-6}$  and  $\epsilon_x = 1100 \times 10^{-6}$ ; then simplify and rearrange:  
 $0.41318\epsilon_y + 0.49240\gamma_{xy} = 850.49 \times 10^{-6}$     (1)

FOR  $\theta = 140^\circ$ :

$$\epsilon_{x_1} = \frac{\epsilon_x + \epsilon_y}{2} + \frac{\epsilon_x - \epsilon_y}{2} \cos 2\theta + \frac{\gamma_{xy}}{2} \sin 2\theta$$

Substitute  $\epsilon_{x_1} = \epsilon_C = -39.44 \times 10^{-6}$  and  $\epsilon_x = 1100 \times 10^{-6}$ ; then simplify and rearrange:  
 $0.41318\epsilon_y - 0.49240\gamma_{xy} = -684.95 \times 10^{-6}$     (2)

SOLVE EQS. (1) AND (2):


$$\epsilon_y = 200.3 \times 10^{-6} \quad \gamma_{xy} = 1559.2 \times 10^{-6}$$

HOOKE'S LAW

$$\sigma_x = \frac{E}{1 - \nu^2}(\epsilon_x + \nu\epsilon_y) = 91.6 \text{ Mpa} \quad \leftarrow$$

**Problem 7.7-23** Solve Problem 7.7-5 by using Mohr's circle for plane strain.

**Solution 7.7-23 Element in plane strain**

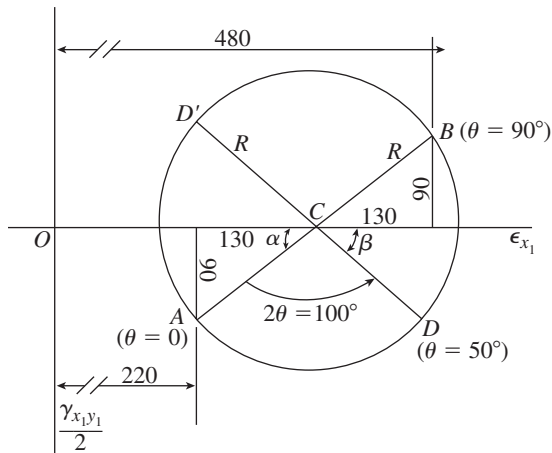

$$\epsilon_x = 220 \times 10^{-6} \quad \epsilon_y = 480 \times 10^{-6}$$

$$\gamma_{xy} = 180 \times 10^{-6} \quad \frac{\gamma_{xy}}{2} = 90 \times 10^{-6} \quad \theta = 50^\circ$$

$$R = \sqrt{(130 \times 10^{-6})^2 + (90 \times 10^{-6})^2}$$

$$= 158.11 \times 10^{-6}$$

$$\alpha = \arctan \frac{90}{130} = 34.70^\circ$$

$$\beta = 180^\circ - \alpha - 2\theta = 45.30^\circ$$

$$\text{POINT C: } \varepsilon_{x_1} = 350 \times 10^{-6}$$

POINT D ( $\theta = 50^\circ$ ):

$$\varepsilon_{x_1} = 350 \times 10^{-6} + R \cos \beta = 461 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = R \sin \beta = 112.4 \times 10^{-6}$$


$$\gamma_{x_1 y_1} = 225 \times 10^{-6}$$

POINT D' ( $\theta = 140^\circ$ ):

$$\varepsilon_{x_1} = 350 \times 10^{-6} - R \cos \beta = 239 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = -R \sin \beta = -112.4 \times 10^{-6}$$

$$\gamma_{x_1 y_1} = -225 \times 10^{-6}$$

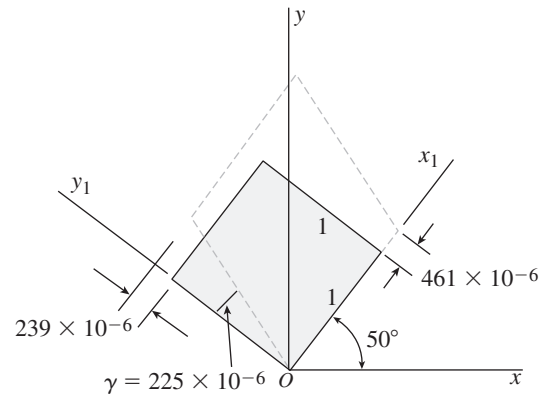


**Problem 7.7-24** Solve Problem 7.7-6 by using Mohr's circle for plane strain.

**Solution 7.7-24 Element in plane strain**

$$\varepsilon_x = 420 \times 10^{-6} \quad \varepsilon_y = -170 \times 10^{-6}$$

$$\gamma_{xy} = 310 \times 10^{-6} \quad \frac{\gamma_{xy}}{2} = 155 \times 10^{-6} \quad \theta = 37.5^\circ$$

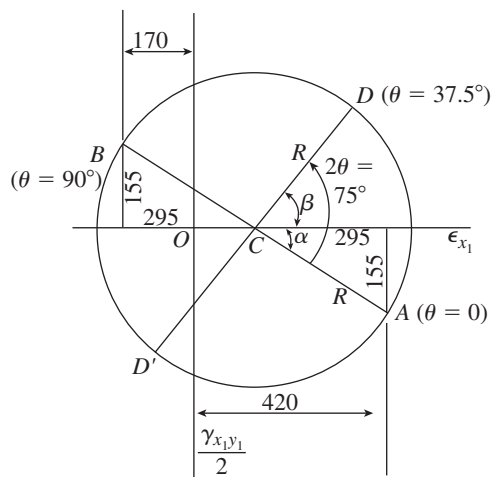

$$R = \sqrt{(295 \times 10^{-6})^2 + (155 \times 10^{-6})^2}$$

$$= 333.24 \times 10^{-6}$$

$$\alpha = \arctan \frac{155}{295} = 27.72^\circ$$

$$\beta = 2\theta - \alpha = 47.28^\circ$$

$$\text{POINT C: } \varepsilon_{x_1} = 125 \times 10^{-6}$$

POINT D ( $\theta = 37.5^\circ$ ):

$$\varepsilon_{x_1} = 125 \times 10^{-6} + R \cos \beta = 351 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = -R \sin \beta = -244.8 \times 10^{-6}$$


$$\gamma_{x_1 y_1} = -490 \times 10^{-6}$$

POINT D' ( $\theta = 127.5^\circ$ ):

$$\varepsilon_{x_1} = 125 \times 10^{-6} - R \cos \beta = -101 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = R \sin \beta = 244.8 \times 10^{-6}$$



$$\gamma_{x_1 y_1} = 490 \times 10^{-6}$$

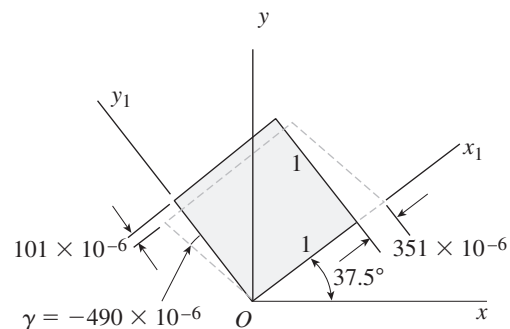

**Problem 7.7-25** Solve Problem 7.7-7 by using Mohr's circle for plane strain.

**Solution 7.7-25 Element in plane strain**

$$\begin{aligned} \epsilon_x &= 480 \times 10^{-6} & \epsilon_y &= 140 \times 10^{-6} \\ \gamma_{xy} &= -350 \times 10^{-6} & \frac{\gamma_{xy}}{2} &= -175 \times 10^{-6} \end{aligned}$$

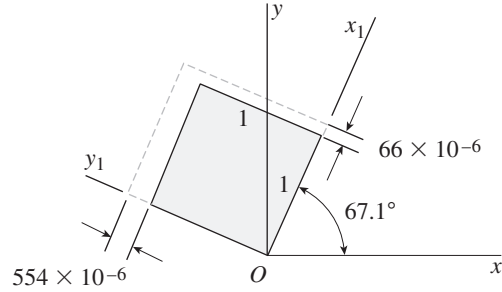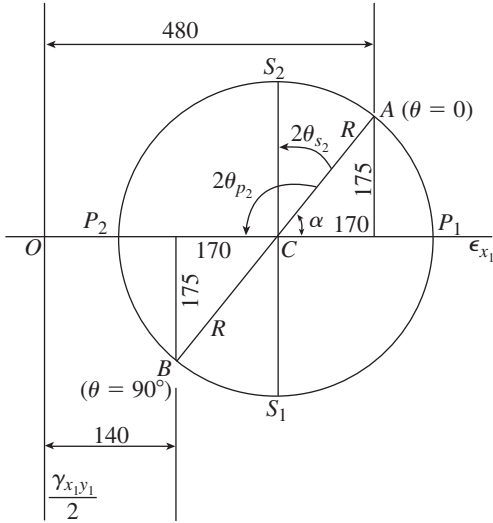

**MAXIMUM SHEAR STRAINS**


$$\begin{aligned} 2\theta_{s_2} &= 90^\circ - \alpha = 44.17^\circ & \theta_{s_2} &= 22.1^\circ \\ 2\theta_{s_1} &= 2\theta_{s_2} + 180^\circ = 224.17^\circ & \theta_{s_1} &= 112.1^\circ \\ \text{Point } S_1: \epsilon_{\text{aver}} &= 310 \times 10^{-6} \\ \gamma_{\text{max}} &= 2R = 488 \times 10^{-6} \\ \text{Point } S_2: \epsilon_{\text{aver}} &= 310 \times 10^{-6} \\ \gamma_{\text{min}} &= -488 \times 10^{-6} \end{aligned}$$

$$\begin{aligned} R &= \sqrt{(175 \times 10^{-6})^2 + (170 \times 10^{-6})^2} \\ &= 243.98 \times 10^{-6} \\ \alpha &= \arctan \frac{175}{170} = 45.83^\circ \end{aligned}$$

POINT C:  $\epsilon_{x_1} = 310 \times 10^{-6}$

**PRINCIPAL STRAINS**


$$\begin{aligned} 2\theta_{p_2} &= 180^\circ - \alpha = 134.2^\circ & \theta_{p_2} &= 67.1^\circ \\ 2\theta_{p_1} &= 2\theta_{p_2} + 180^\circ = 314.2^\circ & \theta_{p_1} &= 157.1^\circ \\ \text{Point } P_1: \epsilon_1 &= 310 \times 10^{-6} + R = 554 \times 10^{-6} \\ \text{Point } P_2: \epsilon_2 &= 310 \times 10^{-6} - R = 66 \times 10^{-6} \end{aligned}$$

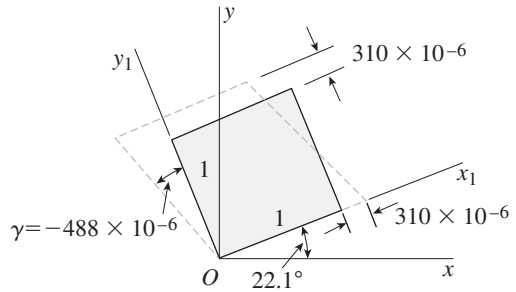

**Problem 7.7-26** Solve Problem 7.7-8 by using Mohr's circle for plane strain.

**Solution 7.7-26 Element in plane strain**

$$\begin{aligned}\varepsilon_x &= 120 \times 10^{-6} & \varepsilon_y &= -450 \times 10^{-6} \\ \gamma_{xy} &= -360 \times 10^{-6} & \frac{\gamma_{xy}}{2} &= -180 \times 10^{-6}\end{aligned}$$

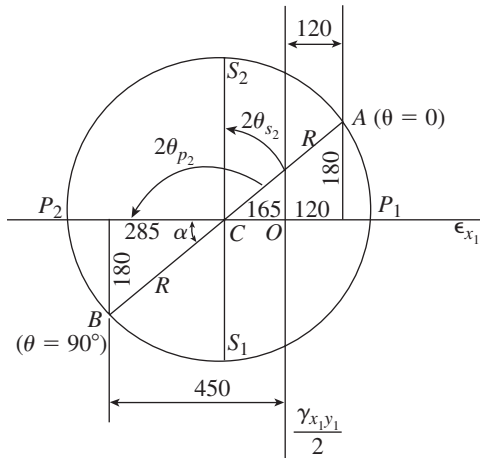


$$\begin{aligned}R &= \sqrt{(285 \times 10^{-6})^2 + (180 \times 10^{-6})^2} \\ &= 337.08 \times 10^{-6}\end{aligned}$$

$$\alpha = \arctan \frac{180}{285} = 32.28^\circ$$

$$\text{POINT C: } \varepsilon_{x_1} = -165 \times 10^{-6}$$


**PRINCIPAL STRAINS**

$$\begin{aligned}2\theta_{p_2} &= 180^\circ - \alpha = 147.72^\circ & \theta_{p_2} &= 73.9^\circ \\ 2\theta_{p_1} &= 2\theta_{p_2} + 180^\circ = 327.72^\circ & \theta_{p_1} &= 163.9^\circ \\ \text{Point } P_1: \varepsilon_1 &= R - 165 \times 10^{-6} = 172 \times 10^{-6} \\ \text{Point } P_2: \varepsilon_2 &= -165 \times 10^{-6} - R = -502 \times 10^{-6}\end{aligned}$$

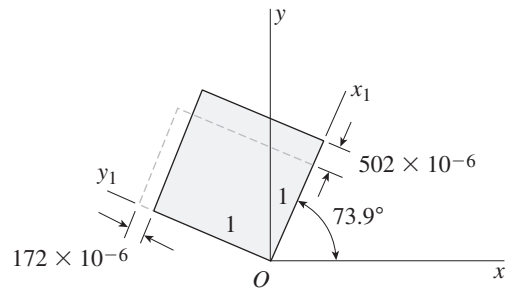

**MAXIMUM SHEAR STRAINS**


$$\begin{aligned}2\theta_{s_2} &= 90^\circ - \alpha = 57.72^\circ & \theta_{s_2} &= 28.9^\circ \\ 2\theta_{s_1} &= 2\theta_{s_2} + 180^\circ = 237.72^\circ & \theta_{s_1} &= 118.9^\circ \\ \text{Point } S_1: \varepsilon_{\text{aver}} &= -165 \times 10^{-6} \\ \gamma_{\text{max}} &= 2R = 674 \times 10^{-6} \\ \text{Point } S_2: \varepsilon_{\text{aver}} &= -165 \times 10^{-6} \\ \gamma_{\text{min}} &= -674 \times 10^{-6}\end{aligned}$$

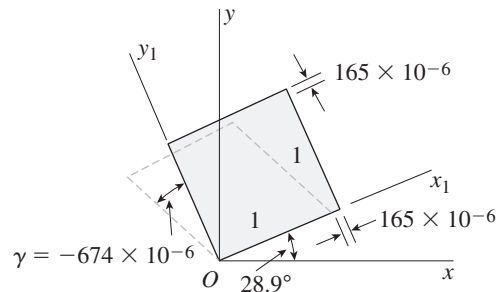

**Problem 7.7-27** Solve Problem 7.7-9 by using Mohr's circle for plane strain.

**Solution 7.7-27 Element in plane strain**

$$\begin{aligned} \epsilon_x &= 480 \times 10^{-6} & \epsilon_y &= 70 \times 10^{-6} \\ \gamma_{xy} &= 420 \times 10^{-6} & \frac{\gamma_{xy}}{2} &= 210 \times 10^{-6} & \theta &= 75^\circ \end{aligned}$$

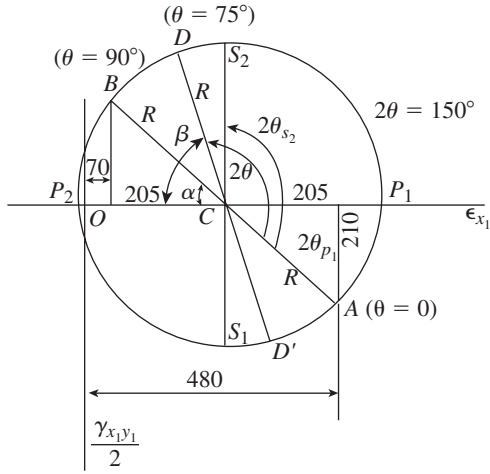

$$R = \sqrt{(205 \times 10^{-6})^2 + (210 \times 10^{-6})^2} = 293.47 \times 10^{-6}$$

$$\alpha = \arctan \frac{210}{205} = 45.69^\circ$$

$$\beta = \alpha + 180^\circ - 2\theta = 75.69^\circ$$

POINT C:  $\epsilon_{x_1} = 275 \times 10^{-6}$

POINT D ( $\theta = 75^\circ$ ):

$$\epsilon_{x_1} = 275 \times 10^{-6} - R \cos \beta = 202 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = -R \sin \beta = -284.36 \times 10^{-6}$$


$$\gamma_{x_1 y_1} = -569 \times 10^{-6}$$

POINT D' ( $\theta = 165^\circ$ ):

$$\epsilon_{x_1} = 275 \times 10^{-6} + R \cos \beta = 348 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = R \sin \beta = 284.36 \times 10^{-6}$$

$$\gamma_{x_1 y_1} = 569 \times 10^{-6}$$

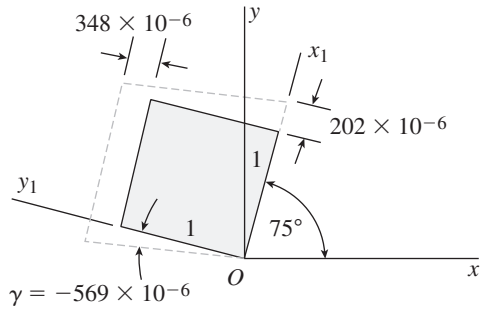


PRINCIPAL STRAINS

$$2\theta_{p_1} = \alpha = 45.69^\circ \quad \theta_{p_1} = 22.8^\circ$$

$$2\theta_{p_2} = 2\theta_{p_1} + 180^\circ = 225.69^\circ \quad \theta_{p_2} = 112.8^\circ$$

Point  $P_1$ :  $\epsilon_1 = 275 \times 10^{-6} + R = 568 \times 10^{-6}$

Point  $P_2$ :  $\epsilon_2 = 275 \times 10^{-6} - R = -18 \times 10^{-6}$

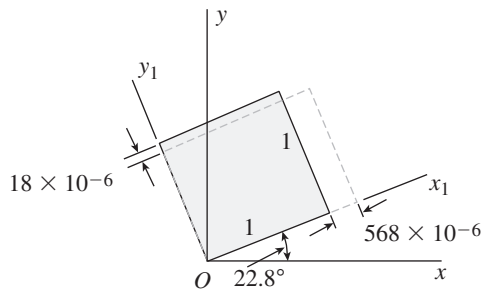

MAXIMUM SHEAR STRAINS

$$2\theta_{s_2} = 90^\circ + \alpha = 135.69^\circ \quad \theta_{s_2} = 67.8^\circ$$


$$2\theta_{s_1} = 2\theta_{s_2} + 180^\circ = 315.69^\circ \quad \theta_{s_1} = 157.8^\circ$$

Point  $S_1$ :  $\epsilon_{aver} = 275 \times 10^{-6}$

$$\gamma_{max} = 2R = 587 \times 10^{-6}$$

Point  $S_2$ :  $\epsilon_{aver} = 275 \times 10^{-6}$

$$\gamma_{min} = -587 \times 10^{-6}$$

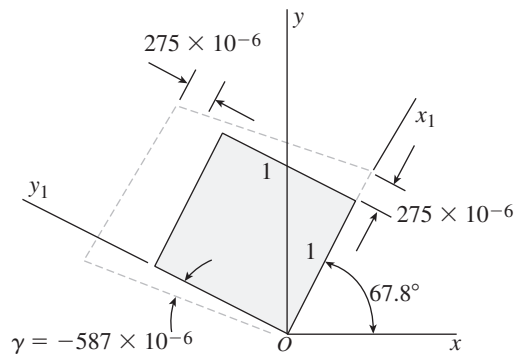


**Problem 7.7-28** Solve Problem 7.7-10 by using Mohr's circle for plane strain.

**Solution 7.7-28 Element in plane strain**

$$\varepsilon_x = -1120 \times 10^{-6} \quad \varepsilon_y = -430 \times 10^{-6}$$

$$\gamma_{xy} = 780 \times 10^{-6} \quad \frac{\gamma_{xy}}{2} = 390 \times 10^{-6} \quad \theta = 45^\circ$$

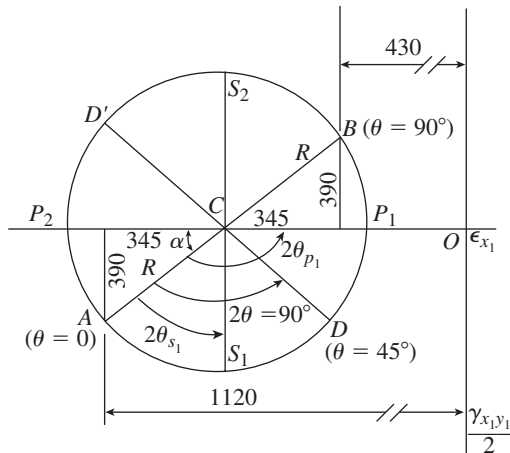

$$R = \sqrt{(345 \times 10^{-6})^2 + (390 \times 10^{-6})^2}$$

$$= 520.70 \times 10^{-6}$$

$$\alpha = \arctan \frac{390}{345} = 48.50^\circ$$

$$\beta = 180^\circ - \alpha - 2\theta = 41.50^\circ$$

POINT C:  $\varepsilon_{x_1} = -775 \times 10^{-6}$

POINT D ( $\theta = 45^\circ$ ):

$$\varepsilon_{x_1} = -775 \times 10^{-6} + R \cos \beta = -385 \times 10^{-6}$$


$$\frac{\gamma_{x_1 y_1}}{2} = R \sin \beta = 345 \times 10^{-6} \quad \gamma_{x_1 y_1} = 690 \times 10^{-6}$$

POINT D' ( $\theta = 135^\circ$ ):

$$\varepsilon_{x_1} = -775 \times 10^{-6} - R \cos \beta = -1165 \times 10^{-6}$$

$$\frac{\gamma_{x_1 y_1}}{2} = -R \sin \beta = -345 \times 10^{-6}$$

$$\gamma_{x_1 y_1} = -690 \times 10^{-6}$$

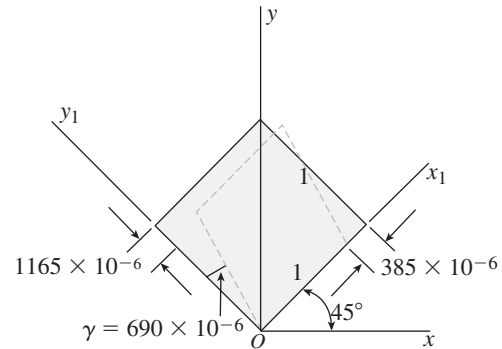


**PRINCIPAL STRAINS**

$$2\theta_{p_1} = 180^\circ - \alpha = 131.50^\circ \quad \theta_{p_1} = 65.7^\circ$$

$$2\theta_{p_2} = 2\theta_{p_1} + 180^\circ = 311.50^\circ \quad \theta_{p_2} = 155.7^\circ$$

Point  $P_1$ :  $\varepsilon_1 = -775 \times 10^{-6} + R = -254 \times 10^{-6}$

Point  $P_2$ :  $\varepsilon_2 = -775 \times 10^{-6} - R = -1296 \times 10^{-6}$

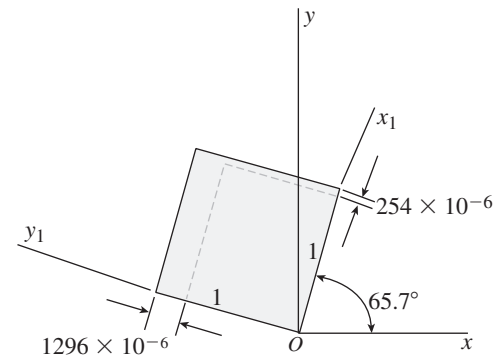

**MAXIMUM SHEAR STRAINS**

$$2\theta_{s_1} = 90^\circ - \alpha = 41.50^\circ \quad \theta_{s_1} = 20.7^\circ$$

$$2\theta_{s_2} = 2\theta_{s_1} + 180^\circ = 221.50^\circ \quad \theta_{s_2} = 110.7^\circ$$

Point  $S_1$ :  $\varepsilon_{\text{aver}} = -775 \times 10^{-6}$

$$\gamma_{\text{max}} = 2R = 1041 \times 10^{-6}$$

Point  $S_2$ :  $\varepsilon_{\text{aver}} = -775 \times 10^{-6}$

$$\gamma_{\text{min}} = -1041 \times 10^{-6}$$

